




Aircraft Tool



- Comes with 9 pcs of collets sized 2.4/2.5/3.0/3.1/3.2/4.5/4.6/5.8/5.9 mm.
- Thread of collet : 9/32"-40

- Powerful, durable and lightweight, suitable for aircraft and sheet metal repairs
- Full Cage Gear Mechanism
- Comfortable and Ergonomic Handle
- Smooth & Quiet Operation




0.3 HP 0.5 HP
3A600-1 3A602-1

0.3 HP 0.5 HP
3A600L-1 3A602L-1

0.3 HP 0.5 HP
3A601-1 3A603-1

0.3 HP 0.5 HP
3A601L-1 3A603L-1



Thread :1/4"-28



0.3 HP 0.5 HP
3A600 3A602

0.3 HP 0.5 HP
3A600L 3A602L

0.3 HP 0.5 HP
3A601 3A603

0.3 HP 0.5 HP
3A601L 3A603L

Item No.	Speed RPM	Power KW/HP	Spindle Size	Collet mm/inch	Length mm/inch	Weight kg/lb	Air Inlet inch	Air Consumption LPM / CFM	Working Pressure Bar / PSI
3A600-1	4,000	0.22 (0.3)	-	2.4 ~ 5.9 mm	240 (9.5)	0.64 (1.4)	1/4	84 (3.0)	6.2 (90)
3A602-1	3,600	0.37 (0.5)	-	2.4 ~ 5.9 mm	259 (10.2)	0.86 (1.9)	1/4	99 (3.5)	6.2 (90)
3A600L-1	4,000	0.22 (0.3)	-	2.4 ~ 5.9 mm	308 (12.1)	0.75 (1.7)	1/4	84 (3.0)	6.2 (90)
3A602L-1	3,600	0.37 (0.5)	-	2.4 ~ 5.9 mm	327 (12.9)	1.00 (2.2)	1/4	99 (3.5)	6.2 (90)
3A601-1	4,000	0.22 (0.3)	-	2.4 ~ 5.9 mm	256 (10.0)	0.64 (1.4)	1/4	84 (3.0)	6.2 (90)
3A603-1	3,600	0.37 (0.5)	-	2.4 ~ 5.9 mm	274 (10.8)	0.86 (1.9)	1/4	99 (3.5)	6.2 (90)
3A601L-1	4,000	0.22 (0.3)	-	2.4 ~ 5.9 mm	333 (13.1)	0.75 (1.7)	1/4	84 (3.0)	6.2 (90)
3A603L-1	3,600	0.37 (0.5)	-	2.4 ~ 5.9 mm	351 (13.8)	1.00 (2.2)	1/4	99 (3.5)	6.2 (90)
3A600	4,000	0.22 (0.3)	1/4"-28	-	240 (9.5)	0.64 (1.4)	1/4	84 (3.0)	6.2 (90)
3A602	3,600	0.37 (0.5)	1/4"-28	-	259 (10.2)	0.86 (1.9)	1/4	99 (3.5)	6.2 (90)
3A600L	4,000	0.22 (0.3)	1/4"-28	-	308 (12.1)	0.75 (1.7)	1/4	84 (3.0)	6.2 (90)
3A602L	3,600	0.37 (0.5)	1/4"-28	-	327 (12.9)	1.00 (2.2)	1/4	99 (3.5)	6.2 (90)
3A601	4,000	0.22 (0.3)	1/4"-28	-	256 (10.0)	0.64 (1.4)	1/4	84 (3.0)	6.2 (90)
3A603	3,600	0.37 (0.5)	1/4"-28	-	274 (10.8)	0.86 (1.9)	1/4	99 (3.5)	6.2 (90)
3A601L	4,000	0.22 (0.3)	1/4"-28	-	333 (13.1)	0.75 (1.7)	1/4	84 (3.0)	6.2 (90)
3A603L	3,600	0.37 (0.5)	1/4"-28	-	351 (13.8)	1.00 (2.2)	1/4	99 (3.5)	6.2 (90)




0.3 HP 0.5 HP
3A600-3 3A602-3

0.3 HP 0.5 HP
3A600L-3 3A602L-3



0.65 HP


1,100 rpm 3,600 rpm 4,400 rpm 5,000 rpm
32413 32414 32415 32416

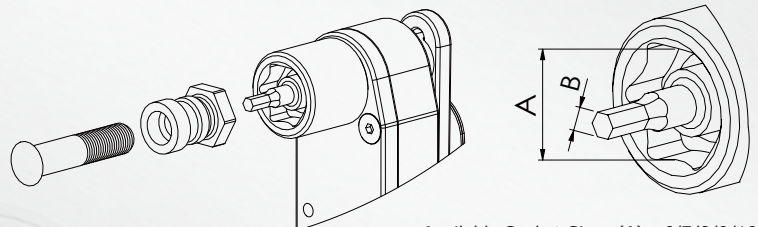

- Available Socket Sizes (A) : 6/7/8/9/10 mm
- Available Key Sizes (B) : 1.5/2.0/2.5/3.0 mm



0.3 HP 0.5 HP
2" Ext. **3A600-2 3A602-2**
5" Ext. **3A600L-2 3A602L-2**

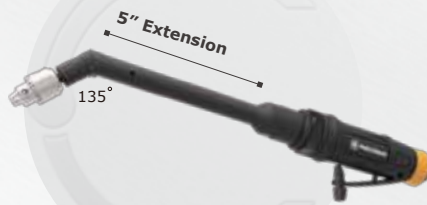

0.3 HP 0.5 HP
2" Ext. **3A601-2 3A603-2**
5" Ext. **3A601L-2 3A603L-2**

**89301****Breakaway Bolt Installation Tool**

Item No.	Speed RPM 	Power KW/HP kW	Chuck Cap. mm/inch 	Spindle Size 	Length mm/inch 	Weight kg/lb kg	Air Inlet inch 	Air Consumption LPM / CFM 	Working Pressure Bar / PSI P
3A600-3	4,000	0.22 (0.3)	-	1/4"-28	240 (9.5)	0.75 (1.7)	1/4	84 (3.0)	6.2 (90)
3A602-3	3,600	0.37 (0.5)	-	1/4"-28	259 (10.2)	0.97 (2.1)	1/4	99 (3.5)	6.2 (90)
3A600L-3	4,000	0.22 (0.3)	-	1/4"-28	308 (12.1)	0.86 (1.9)	1/4	84 (3.0)	6.2 (90)
3A602L-3	3,600	0.37 (0.5)	-	1/4"-28	327 (12.9)	1.11 (2.4)	1/4	99 (3.5)	6.2 (90)
3A600-2	4,000	0.22 (0.3)	1/8"	-	240 (9.5)	0.64 (1.4)	1/4	84 (3.0)	6.2 (90)
3A602-2	3,600	0.37 (0.5)	1/8"	-	259 (10.2)	0.86 (1.9)	1/4	99 (3.5)	6.2 (90)
3A600L-2	4,000	0.22 (0.3)	1/8"	-	308 (12.1)	0.75 (1.7)	1/4	84 (3.0)	6.2 (90)
3A602L-2	3,600	0.37 (0.5)	1/8"	-	327 (12.9)	1.00 (2.2)	1/4	99 (3.5)	6.2 (90)
3A601-2	4,000	0.22 (0.3)	1/8"	-	256 (10.0)	0.64 (1.4)	1/4	84 (3.0)	6.2 (90)
3A603-2	3,600	0.37 (0.5)	1/8"	-	274 (10.8)	0.86 (1.9)	1/4	99 (3.5)	6.2 (90)
3A601L-2	4,000	0.22 (0.3)	1/8"	-	333 (13.1)	0.75 (1.7)	1/4	84 (3.0)	6.2 (90)
3A603L-2	3,600	0.37 (0.5)	1/8"	-	351 (13.8)	1.00 (2.2)	1/4	99 (3.5)	6.2 (90)
32413	1,100	0.48 (0.65)	6 (1/4)	3/8"-24	182 (7.2)	0.90 (2.0)	1/4	99 (3.5)	6.2 (90)
32414	3,600	0.48 (0.65)	6 (1/4)	3/8"-24	154 (6.1)	0.70 (1.5)	1/4	99 (3.5)	6.2 (90)
32415	4,400	0.48 (0.65)	6 (1/4)	3/8"-24	154 (6.1)	0.70 (1.5)	1/4	99 (3.5)	6.2 (90)
32416	5,000	0.48 (0.65)	6 (1/4)	3/8"-24	154 (6.1)	0.70 (1.5)	1/4	99 (3.5)	6.2 (90)
89301	400	0.48 (0.65)	-	-	293 (11.5)	1.18 (2.6)	1/4	99 (3.5)	6.2 (90)