







PS2 Safety Coupler

- **Push-in Connection** for easy use
- **Safety 2-Step Disconnection**
- **The lightweight and composite body can avoid scratching the car body.**

Patent No. I405923

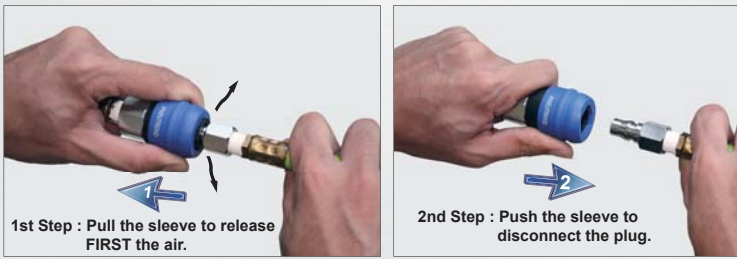

COUPLING	ACTUAL SIZE (1 : 1)	ITEM NO. CONNECTION	COUPLING	ACTUAL SIZE (1 : 1)	ITEM NO. CONNECTION
	 Ø7.8 mm	A2201-SCF14B 1/4" Female		 Ø9.8 mm	A2202-SCF14B 1/4" Female
		A2201-SCM14B 1/4" Male			A2202-SCM14B 1/4" Male
		Industrial Profile A2201-SCH10B 10mm Hose-tail			European Profile A2202-SCH10B 10mm Hose-tail
	 Ø11 mm	A2204-SCF14B 1/4" Female			
		A2204-SCM14B 1/4" Male			
		Japanese Profile A2204-SCH10B 10mm Hose-tail			

* **Common Spec.** : Body Size : 1/4" ; Max. Working Pressure : 10 Bar (145 PSI) ; Working Temperature : -20 °C ~ 80 °C (-4 °F ~ 176 °F)

Push Button Safety Coupler

- **Push-in Connection** for easy use
- **Safety 2-Step Disconnection**
- **The composite body can avoid scratching the car body.**

Easy-to-Use Push Button



1st Step - Push to stop air flow
2nd Step - Push again to release plug

COUPLING	ACTUAL SIZE (1 : 1)	ITEM NO. CONNECTION	COUPLING	ACTUAL SIZE (1 : 1)	ITEM NO. CONNECTION
	 Ø9.8 mm	A2202U-SCF14 1/4" Female		 Ø11 mm	A2204U-SCF14 1/4" Female
		A2202U-SCF38 3/8" Female			A2204U-SCF38 3/8" Female
		A2202U-SCM14 1/4" Male			A2204U-SCM14 1/4" Male
	 Ø9.8 mm	A2202U-SCM38 3/8" Male		 Ø11 mm	A2204U-SCM38 3/8" Male

* **Common Spec.** : Max. Working Pressure : 12 Bar (174 PSI) ; Working Temperature : -20 °C ~ 80 °C (-4 °F ~ 176 °F)