



# Tri-Lobe Clutch Impact Wrench



- **Tri-Lobe Clutch** : Suitable for industrial maintenance and production
- **Smooth & Gradual build-up to "peak" torque** : It gives you full control and comfort even at high torque application.
- **Lightweight, Durable, Powerful and Low Vibration !**



**28738**

1" (2,000 ft-lb)

**28738-6** 6" Anvil

1" (1,800 ft-lb)


**New !**



## Tri-Lobe Clutch

### Advantages of Tri-Lobe Clutch

- Stable Power Output
- Low Vibration
- Durable use in tough condition

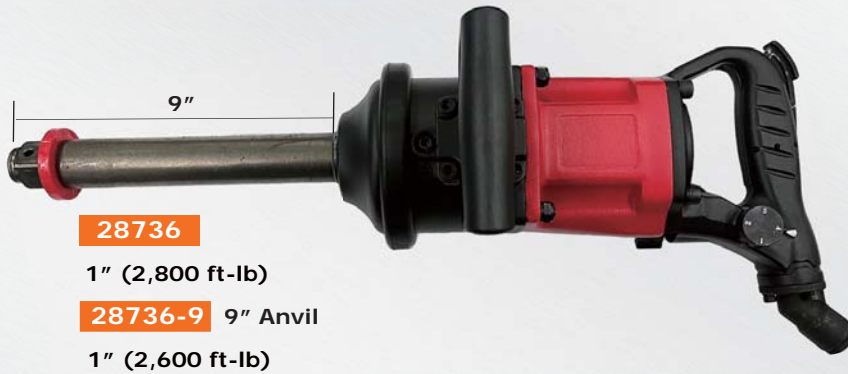

**28736**

1" (2,800 ft-lb)

**28736-9** 9" Anvil

1" (2,600 ft-lb)



**Easy Change Direction**  
in Forward and Reverse



**28739**

1" (1,600 ft-lb)

**28739-6** 6" Anvil

1" (1,400 ft-lb)



**24739**

1/2" (1,050 ft-lb)



**26739**

3/4" (1,400 ft-lb)

Item No.	Speed RPM	Square Drive	Max. Torque Nm/ft-lb	Length mm/inch	Weight kg/lb	Air Consumption LPM / CFM	Air Inlet inch	Vibration m/s <sup>2</sup>	Noise Level LpA / LwA	Working Pressure Bar / PSI
28738	4,500	1"	2,710 (2,000)	363 (14.3)	7.4 (16.3)	215 (7.6)	1/2	8.69	103 / 114 DB	6.2 (90)
28738-6	4,500	1"	2,439 (1,800)	482 (19)	8.1 (17.8)	215 (7.6)	1/2	9.90	103 / 114 DB	6.2 (90)
28736	4,000	1"	3,796 (2,800)	410 (16.1)	10.2 (22.4)	202 (7.1)	1/2	7.55	101 / 112 DB	6.2 (90)
28736-9	4,000	1"	3,523 (2,600)	545 (21.5)	11.4 (25.1)	202 (7.1)	1/2	6.96	101 / 112 DB	6.2 (90)
28739	3,500	1"	2,168 (1,600)	270(10.6)	7.1 (15.6)	170 (6.0)	3/8	7.60	92 / 103 DB	6.2 (90)
28739-6	3,500	1"	1,897 (1,400)	393 (15.5)	7.9 (17.4)	170 (6.0)	3/8	10.02	92 / 103 DB	6.2 (90)
24739	7,000	1/2"	1,423 (1,050)	173 (6.81)	1.9 (4.3)	139 (4.9)	1/4	6.10	91 / 102 DB	6.2 (90)
26739	5,500	3/4"	1,897 (1,400)	210 (8.27)	3.6 (7.9)	178 (6.3)	3/8	6.74	91 / 102 DB	6.2 (90)