



Multi-Angle Tool Series

- Suitable for working in confined space, like gearbox, engine, transmission, farming cultivator, etc.
- **"Double Air Intake" Motor** increases work efficiency by 25% up, making **SMALL impact wrenches POWERFUL**.
- **Tubeless Dual Air Channel** : consistently smooth, sufficient air flow supply while adjusting handle and motor housing.

1.3 kg Only !

360° Swivel Handle

+/- 60° Bendable Motor Housing

Palm Impact Wrench

88 mm

• **Mini & Lightweight**

Twin Hammer

	Twin	3/8"		1/2"
	23244		24244	
	Jumbo 23644		24644	

23245

3/8"

24245

1/2"

Item No.	Cluth Type	Speed RPM	Square Drive	Max. Torque Nm/ft-lb	Length mm/inch	Weight kg/lb	Air Consumption LPM / CFM	Air Inlet inch	Vibration m/s ²	Noise Level LpA / LwA	Working Pressure Bar / PSI
23244	(Twin Hammer)	8,000	3/8"	500 (369)	88 (3.5)	1.4 (3.1)	113 (4.0)	1/4	4.89	84.8 / 95.8 DB	6.2 (90)
24244	(Twin Hammer)	8,000	1/2"	500 (369)	85 (3.3)	1.4 (3.1)	113 (4.0)	1/4	4.89	84.8 / 95.8 DB	6.2 (90)
23644	(Jumbo Hammer)	9,000	3/8"	300 (221)	76 (3.0)	1.3 (2.8)	84 (3.0)	1/4	4.89	96.4 / 107.4 DB	6.2 (90)
24644	(Jumbo Hammer)	9,000	1/2"	300 (221)	76 (3.0)	1.3 (2.8)	84 (3.0)	1/4	4.89	96.4 / 107.4 DB	6.2 (90)
23245	(Twin Hammer)	7,500	3/8"	500 (369)	88 (3.5)	1.1 (2.4)	96 (3.4)	1/4	7.24	90.8 / 101.8 DB	6.2 (90)
24245	(Twin Hammer)	7,500	1/2"	500 (369)	85 (3.3)	1.1 (2.4)	96 (3.4)	1/4	7.64	93.1 / 104.1 DB	6.2 (90)




3" Pad / 0.4HP
52136F

New

- **Multi-angle adjustable head**
- **Powerful for industrial use**
- **360 swivel air exhaust**



3" Pad / 0.4 HP
54037F
50037F

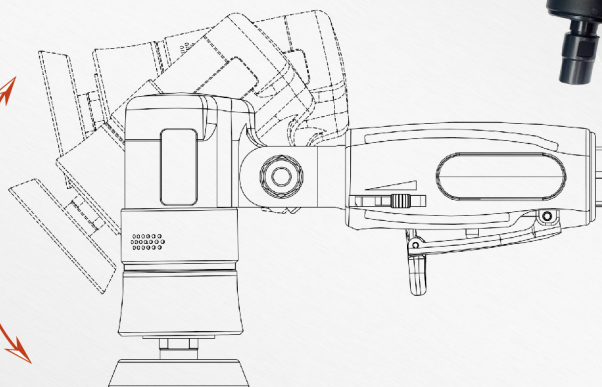

Power: 0.3 KW (0.4 HP) / Air Inlet : 1/4" / Working Pressure : 6.2 Bar (90 PSI)

Item No.	Speed RPM	Collet mm/inch	Pad mm/inch	Spindle Size	Length mm/inch	Weight kg/lb	Air Consumption LPM / CFM	Vibration m/s ²	Noise Level LpA / LwA
52136F	15,000	-	75 (3)	5/16" - 24	178 (7.0)	0.7 (1.56)	83 (2.9)	9.49	81.5 / 91.5 DB
54037F	20,000	-	75 (3)	5/16" - 24	178 (7.0)	0.6 (1.3)	79 (2.8)	1.24	81.3 / 92.3 DB
50037F	5,000	-	75 (3)	5/16" - 24	174 (6.9)	0.8 (1.7)	79 (2.8)	2.91	81.7 / 92.7 DB
71206F	20,000	6 (1/4)	-	-	178 (7.0)	0.6 (1.3)	83 (2.9)	2.74	82.6 / 93.6 DB