




Sanding System

- Efficiency expert for sanding work
- Time-saving design and make smooth surface finish
- **Ultra Action** results swirl-free and easy to remove water spots, scratches and orange peel.



- 12,000 rpm
- Non Vacuum

Ultra Action



VS

General Orbit



Advantages of Ultra Action

- Perfect finish and optimize workflow
- Increase productivity

2.5 mm Orbit

5D561-H

5D551-H

9.0 mm Orbit

5D161-H

5D151-H

Orbit	Application
2.5 mm	Initial Sanding
9.0 mm	Fast material removal



3mm orbit

12,000 rpm 7,500 rpm


58105

58106

Nib Sander

5" (125mm) | 6" (150mm) IN ONE SANDER

- **Unique Counterweight Screw design**
- **Tool inventory reduction**

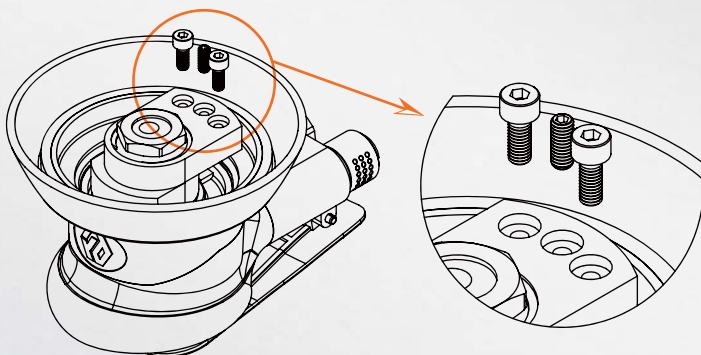

Counterweight screw adjustment

- Screws removal : for 5" (125mm) Sander
- Screw-in : for 6" (150mm) Sander



3mm orbit

4,000 rpm

58416

Nib Sander

Item No.	Speed RPM	Pad mm/inch	Orbit mm	Power KW/HP	Length mm/inch	Weight kg/lb	Air Consumption LPM / CFM	Air Inlet inch	Vibration m/s ²	Noise Level LpA / LwA	Working Pressure Bar / PSI
5D561-H	12,000	150 (6)	2.5	0.22 (0.3)	150 (5.9)	0.86 (1.9)	62 (2.2)	1/4	< 2.5	81.0 / 92.0 DB	6.2 (90)
5D551-H	12,000	125 (5)	2.5	0.22 (0.3)	150 (5.9)	0.82 (1.8)	62 (2.2)	1/4	< 2.5	81.0 / 92.0 DB	6.2 (90)
5D161-H	12,000	150 (6)	9.0	0.22 (0.3)	150 (5.9)	0.93 (2.0)	62 (2.2)	1/4	4.90	81.0 / 92.0 DB	6.2 (90)
5D151-H	12,000	125 (5)	9.0	0.22 (0.3)	150 (5.9)	0.87 (1.9)	62 (2.2)	1/4	4.80	81.0 / 92.0 DB	6.2 (90)
58105	12,000	30 (1.2)	3.0	0.22 (0.3)	187 (7.4)	0.65 (1.4)	24 (0.8)	1/4	5.80	75.0 / 86.0 DB	4.5 (65)
58106	7,500	30 (1.2)	3.0	0.11 (0.15)	187 (7.4)	0.65 (1.4)	24 (0.8)	1/4	5.80	75.0 / 86.0 DB	1.6 (23)
58416	4,000	30 (1.2)	3.0	0.04 (0.06)	103 (4.1)	0.56 (1.2)	11 (0.4)	1/4	2.86	72.6 / 83.6 DB	6.2 (90)



Clear Coat Solutions

Sanding / Polishing

- **3 mm + 15 mm Orbit-Action**
- **Highly efficiency for sanding and buffing**
- **Easy sanding for the thin panels and tight**



3mm+15mm Orbit

B-50176 3" Ext. Angle Sander | Polisher Kit

Digital Display shows the accurate pressure after regulation.

Right orbit for expert finish

Orbit		Application
3mm		• Detail Sanding, Nibbing • Ultimate detail polishing
15mm		• Compound rectification • Superior Polishing

- Ideal for buffing and polishing in small areas
- For **quick and easy spot repair** on variety of surface
- **Pressure Control** to prevent burn in clearcoat
- Digital Display

Massive Orbit Buffer

- **14mm or 15mm Orbit-Action**
- **Ultra Action to fast remove scratches**

Lubrication Free !



50930 15 mm Orbit

3" Ultra Action Buffer



50950 15 mm Orbit

5" Ultra Action Buffer



50185 5" Buffer 15 mm Orbit



50180 3" Buffer 14 mm Orbit

Item No.	Speed RPM 	Pad mm/inch 	Orbit mm 	Power KW/HP kW	Length mm/inch 	Weight kg/lb kg	Air Consumption LPM / CFM 	Air Inlet inch 	Vibration m/s² 	Noise Level LpA / LwA 	Working Pressure Bar / PSI P
B-50176	5,000	30 (1.2) + 50 (2)	3 + 15	0.22 (0.3)	286 (11.3)	1.0 (2.2)	57 (2.0)	1/4	< 2.5	78.1 / 89.1 DB	4.8 (70)
50180	12,000	75 (3)	14	0.22 (0.3)	252 (9.9)	1.20 (2.6)	62 (2.2)	1/4	2.65	78.1 / 89.1 DB	3.4 (50)
50185	12,000	125 (5)	15	0.22 (0.3)	276 (10.9)	1.30 (2.8)	62 (2.2)	1/4	7.70	78.1 / 89.1 DB	3.4 (50)
50930	12,000	75 (3)	15	0.22 (0.3)	120 (4.7)	0.69 (1.5)	62 (2.2)	1/4	2.66	81.0 / 92.0 DB	6.2 (90)
50950	12,000	125 (5)	15	0.22 (0.3)	120 (4.7)	0.77 (1.7)	62 (2.2)	1/4	3.40	75.0 / 86.0 DB	6.2 (90)