




Tri-Lobe Clutch Impact Wrench



- **Tri-Lobe Clutch** : Suitable for industrial maintenance and production
- **Smooth & Gradual build-up to "peak" torque** :
It gives you full control and comfort even at high torque application.
- **Lightweight, Durable, Powerful and Low Vibration !**

Tri-Lobe Clutch


New

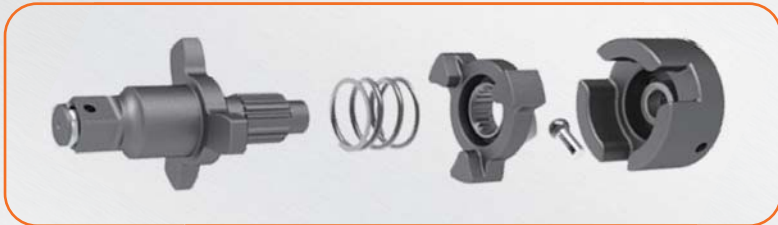

Powerful !
Durable !

Advantages of Tri-Lobe Clutch

- **Stable Power Output**
- **Low Vibration**
- **Durable use in tough condition**

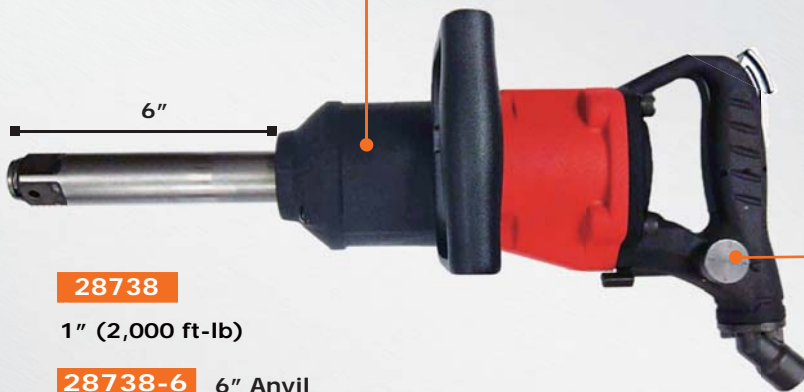

28738

1" (2,000 ft-lb)

28738-6 6" Anvil

1" (1,800 ft-lb)

4 SETTING TORQUE
in forward and reverse



28736

1" (2,800 ft-lb)

28736-9 9" Anvil

1" (2,600 ft-lb)

Item No.	Speed RPM	Square Drive	Max. Torque Nm/ft-lb	Length mm/inch	Weight kg/lb	Air Consumption LPM / CFM	Air Inlet inch	Vibration m/s ²	Noise Level LpA / LwA	Working Pressure Bar / PSI
28738	4,500	1"	2,710 (2,000)	363 (14.3)	7.4 (16.3)	215 (7.6)	1/2	8.69	103 / 114 DB	6.2 (90)
28738-6	4,500	1"	2,439 (1,800)	482 (19)	8.1 (17.8)	215 (7.6)	1/2	9.90	103 / 114 DB	6.2 (90)
28736	4,000	1"	3,796 (2,800)	410 (16.1)	10.2 (22.4)	202 (7.1)	1/2	7.55	101 / 112 DB	6.2 (90)
28736-9	4,000	1"	3,523 (2,600)	545 (21.5)	11.4 (25.1)	202 (7.1)	1/2	6.96	101 / 112 DB	6.2 (90)




Tri-Lobe Clutch Impact Wrench

Tri-Lobe Clutch



- *Steady Power*
- *Durable*
- *Low Vibration*

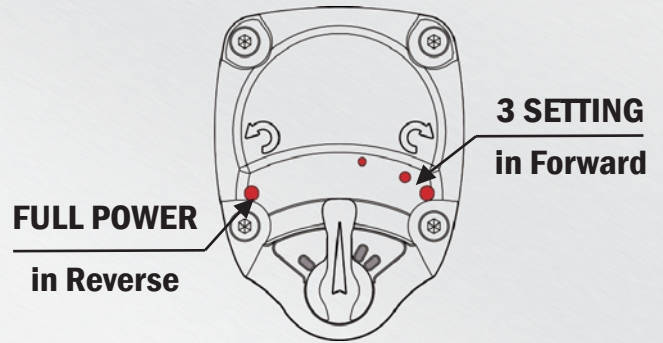

28739

1" (1,600 ft-lb)






26740

3/4" (1,300 ft-lb)



24740

1/2" (1,150 ft-lb)

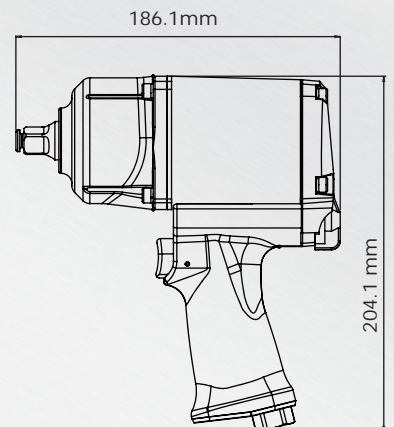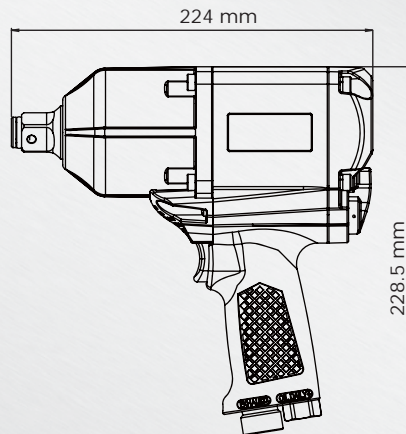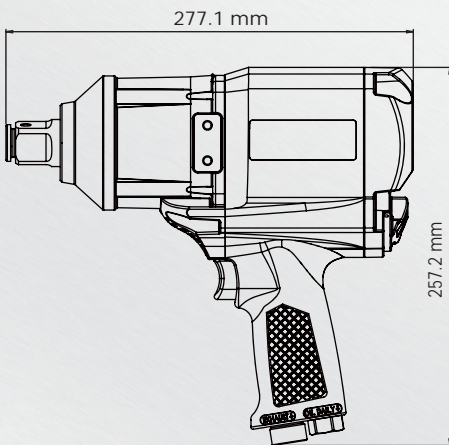

Item No.	Speed RPM	Square Drive	Max. Torque Nm/ft-lb	Length mm/inch	Weight kg/lb	Air Consumption LPM / CFM	Air Inlet inch	Vibration m/s ²	Noise Level LpA / LwA	Working Pressure Bar / PSI
28739	3,500	1"	2,168 (1,600)	270 (10.6)	7.1 (15.6)	170 (6.0)	3/8	7.60	92 / 103 DB	6.2 (90)
28739-6	3,500	1"	1,897 (1,400)	393 (15.5)	7.9 (17.4)	170 (6.0)	3/8	10.02	92 / 103 DB	6.2 (90)
26740	5,200	3/4"	1,762 (1,300)	218 (8.6)	4.3 (9.5)	167 (5.9)	3/8	6.34	88.7 / 99.7 DB	6.2 (90)
24740	7,000	1/2"	1,559 (1,150)	187 (7.36)	2.8 (6.3)	156 (5.5)	1/4	6.36	93 / 104 DB	6.2 (90)