

- Ergonomic grip with low-noise design
- Low profile for easy control and greater comfort
- Ultra Action assures swirl-free finish on a wide variety of surfaces

## Ultra Action



Energy-efficient !


Lubrication Free !



| Orbit  | Application        |
|--------|--------------------|
| 2.5 mm | Fine Sanding       |
| 5.0 mm | General Sanding    |
| 9.0 mm | Aggressive Sanding |

5" (125mm) | 6" (150mm) IN ONE SANDER

- Unique Counterweight Screw design
- Tool inventory reduction

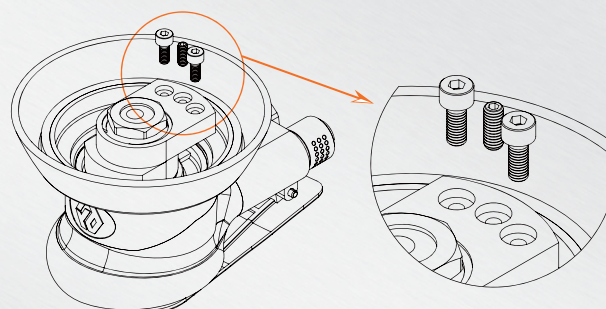

- Screws removal : for 5" (125mm) Sander
- Screw-in : for 6" (150mm) Sander

Speed : 12,000 RPM / Power : 0.22 KW (0.3 HP) / Spindle : 5/16"-24 / Air Inlet : 1/4" / Air Flow : 62 LPM (2.2 CFM)



## Non Vacuum

| Item No. | Pad<br>mm/inch | Orbit<br>mm | Length<br>mm/inch | Weight<br>kg/lb | Vibration<br>m/s <sup>2</sup> | Noise Level<br>DB (LpA) | Working Pressure<br>Bar / PSI |
|----------|----------------|-------------|-------------------|-----------------|-------------------------------|-------------------------|-------------------------------|
| 5D561-H  | 150 (6.0)      | 2.5         | 150 (5.9)         | 0.86 (1.9)      | < 2.5                         | 81.0                    | 6.2 (90)                      |
| 5D361-H  | 150 (6.0)      | 5.0         | 150 (5.9)         | 0.89 (2.0)      | 2.9                           | 81.0                    | 6.2 (90)                      |
| 5D161-H  | 150 (6.0)      | 9.0         | 150 (5.9)         | 0.93 (2.0)      | 4.9                           | 81.0                    | 6.2 (90)                      |
| 5D551-H  | 125 (5.0)      | 2.5         | 150 (5.9)         | 0.82 (1.8)      | < 2.5                         | 81.0                    | 6.2 (90)                      |
| 5D351-H  | 125 (5.0)      | 5.0         | 150 (5.9)         | 0.84 (1.8)      | 2.8                           | 81.0                    | 6.2 (90)                      |
| 5D151-H  | 125 (5.0)      | 9.0         | 150 (5.9)         | 0.87 (1.9)      | 4.8                           | 81.0                    | 6.2 (90)                      |
| 5D531-H  | 75 (3.0)       | 2.5         | 150 (5.9)         | 0.82 (1.8)      | < 2.5                         | 81.0                    | 6.2 (90)                      |



## Central Vacuum

| Item No. | Pad<br>mm/inch | Orbit<br>mm | Length<br>mm/inch | Weight<br>kg/lb | Vibration<br>m/s <sup>2</sup> | Noise Level<br>DB (LpA) | Working Pressure<br>Bar / PSI |
|----------|----------------|-------------|-------------------|-----------------|-------------------------------|-------------------------|-------------------------------|
| 5D562-H  | 150 (6.0)      | 2.5         | 215 (8.5)         | 0.92 (2.0)      | < 2.5                         | 81.0                    | 6.2 (90)                      |
| 5D362-H  | 150 (6.0)      | 5.0         | 215 (8.5)         | 0.96 (2.1)      | 2.9                           | 81.0                    | 6.2 (90)                      |
| 5D162-H  | 150 (6.0)      | 9.0         | 215 (8.5)         | 1.00 (2.2)      | 4.9                           | 81.0                    | 6.2 (90)                      |
| 5D552-H  | 125 (5.0)      | 2.5         | 215 (8.5)         | 0.89 (1.9)      | < 2.5                         | 81.0                    | 6.2 (90)                      |
| 5D352-H  | 125 (5.0)      | 5.0         | 215 (8.5)         | 0.91 (2.0)      | 2.8                           | 81.0                    | 6.2 (90)                      |
| 5D152-H  | 125 (5.0)      | 9.0         | 215 (8.5)         | 0.94 (2.1)      | 4.8                           | 81.0                    | 6.2 (90)                      |
| 5D532-H  | 75 (3.0)       | 2.5         | 215 (8.5)         | 0.82 (1.8)      | < 2.5                         | 81.0                    | 6.2 (90)                      |



## Self Vacuum

| Item No. | Pad<br>mm/inch | Orbit<br>mm | Length<br>mm/inch | Weight<br>kg/lb | Vibration<br>m/s <sup>2</sup> | Noise Level<br>DB (LpA) | Working Pressure<br>Bar / PSI |
|----------|----------------|-------------|-------------------|-----------------|-------------------------------|-------------------------|-------------------------------|
| 5D563-H  | 150 (6.0)      | 2.5         | 215 (8.5)         | 0.92 (2.0)      | < 2.5                         | 85.9                    | 6.2 (90)                      |
| 5D363-H  | 150 (6.0)      | 5.0         | 215 (8.5)         | 0.96 (2.1)      | 2.9                           | 85.9                    | 6.2 (90)                      |
| 5D163-H  | 150 (6.0)      | 9.0         | 215 (8.5)         | 1.00 (2.2)      | 4.9                           | 85.9                    | 6.2 (90)                      |
| 5D553-H  | 125 (5.0)      | 2.5         | 215 (8.5)         | 0.89 (1.9)      | < 2.5                         | 85.9                    | 6.2 (90)                      |
| 5D353-H  | 125 (5.0)      | 5.0         | 215 (8.5)         | 0.91 (2.0)      | 2.8                           | 85.9                    | 6.2 (90)                      |
| 5D153-H  | 125 (5.0)      | 9.0         | 215 (8.5)         | 0.94 (2.1)      | 4.8                           | 85.9                    | 6.2 (90)                      |
| 5D533-H  | 75 (3.0)       | 2.5         | 215 (8.5)         | 0.82 (1.8)      | < 2.5                         | 85.9                    | 6.2 (90)                      |