




- **Double Air Intake motor** supply high torque output
- **Multi-Function Tool- Grinder / Sander / Cutter**
- **Power up to 0.7HP**
- **Swivel and bilateral exchangeable exhaust design**

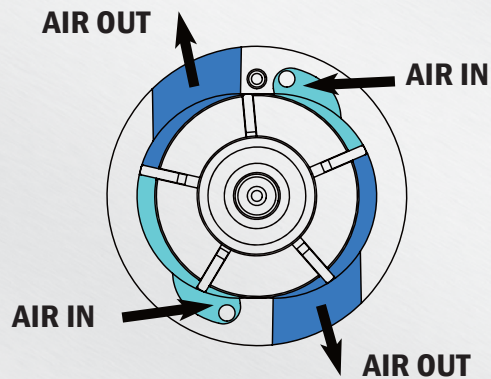

### Double Air Intake advantage

- **Stable Power Output**
- **High torque**
- **Low Air Requirement**

### 79105 for Multi-Function

- **Grinder**
- **Cutter**
- **Sander**

\* Flange of Central hole: 22 mm

\* Spindle Size :

Outer M14 x 2.0 (M)

Inner 5/16"-24(F)

### Swivel Exhaust

### Bilateral exchangeable

### Fast guard adjustment

360°



**79105** 5" Grinder/Sander/Cutter

|            |                  |
|------------|------------------|
| Speed      | 11,000 rpm       |
| Power      | 0.52 kw (0.7 hp) |
| Wheel Cap. | 125 mm (5")      |



**79000** 5" Vertical Grinder

|            |                  |
|------------|------------------|
| Speed      | 12,000 rpm       |
| Power      | 1.04 kw (1.4 hp) |
| Wheel Cap. | 125 mm (5")      |



**79001** 7" **79010** 9"

|            |                  |                 |
|------------|------------------|-----------------|
| Speed      | 7,000 rpm        | 5,900 rpm       |
| Power      | 1.57 kw (2.1 hp) | 1.8 kw (2.4 hp) |
| Wheel Cap. | 180 mm (7")      | 230 mm (9")     |

| Item No. | Speed<br>RPM<br> | Power<br>KW/HP<br>kW | Spindle<br>Size<br>                       | Wheel<br>mm/inch<br> | Length<br>mm/inch<br> | Weight<br>kg/lb<br>kg | Air Inlet<br>inch<br> | Air Consumption<br>LPM / CFM<br> | Working Pressure<br>Bar / PSI<br>P |
|----------|------------------|----------------------|-------------------------------------------|----------------------|-----------------------|-----------------------|-----------------------|----------------------------------|------------------------------------|
| 79105    | 11,000           | 0.5 (0.7)            | Outer M14 x 2.0 (M),<br>Inner 5/16"-24(F) | 125 (5)              | 184 (7.2)             | 1.7 (3.7)             | 1/4                   | 143 (5.0)                        | 6.2 (90)                           |
| 79000    | 12,000           | 1.0 (1.4)            | 5/8"-11 or M14 x 2.0                      | 125 (5)              | 240 (9.5)             | 3.1 (6.8)             | 3/8                   | 167 (5.9)                        | 6.2 (90)                           |
| 79001    | 7,000            | 1.5 (2.1)            | 5/8"-11 or M14 x 2.0                      | 180 (7)              | 260 (10.2)            | 4.4 (9.8)             | 3/8                   | 224 (7.9)                        | 6.2 (90)                           |
| 79010    | 5,900            | 1.8 (2.4)            | 5/8"-11                                   | 230 (9)              | 279 (11)              | 5.8 (12.7)            | 1/2                   | 396 (14)                         | 6.2 (90)                           |