


Inline Preset Pressure Regulator

- It supplies a constant pre-set pressure regardless of the input pressure.
- Locked to prevent pressure change - tamper proof
- Safe, energy saving and economical
- Lightweight and compact construction
- No pressure gauge needed
- Increases the tool service life

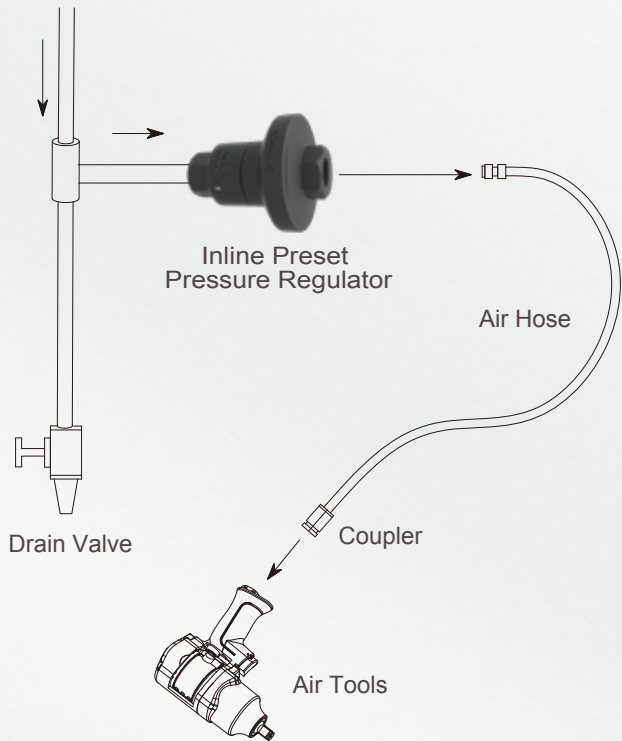


2 Bar (29 PSI) 4 Bar (58 PSI) 6.2 Bar (90 PSI) 7.6 Bar (110 PSI)

A2088-030 A2088-060 A2088-090 A2088-110

Item No.	Output Pressure	Flow Rate	Connection	Max. Input Pressure	Accuracy	Length	Weight
A2088-030	2 Bar (29 PSI)	1300 L/Min.	1/4" Inlet ; 1/4" Outlet	4 Bar (58 PSI)	10%	61 mm (2.4")	0.1 kg (0.22 lbs)
A2088-060	4 Bar (58 PSI)	1300 L/Min.	1/4" Inlet ; 1/4" Outlet	7 Bar (100 PSI)	10%	61 mm (2.4")	0.1 kg (0.22 lbs)
A2088-090	6.2 Bar (90 PSI)	1300 L/Min.	1/4" Inlet ; 1/4" Outlet	10 Bar (145 PSI)	10%	61 mm (2.4")	0.1 kg (0.22 lbs)
A2088-110	7.6 Bar (110 PSI)	1300 L/Min.	1/4" Inlet ; 1/4" Outlet	13.8 Bar (200 PSI)	10%	61 mm (2.4")	0.1 kg (0.22 lbs)

Digital Regulator

- The digital air flow regulator ensures accurate measurement of air pressure to HVLP, HP, conventional spray guns and other tools.
- Measuring Range: 0 ~ 6.88 Bar (99.8 PSI)
- Pressure Increment : 0.02 Bar (0.2 PSI)
- High Flow Rate : 1,132 L/Min. (40 SCFM)
- Voltage: 3V DC Battery
- Battery Life: 1,500 hours (continuously)
- Accuracy: +(-) 2% full scale
- Calibration traceable to NIST
- Dimension : 44 x 30 x 36 mm (1.73" x 1.18" x 1.42")
- Weight : 90 g (0.198 lbs)

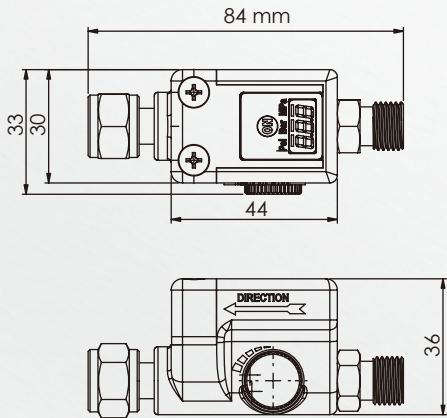

A2099