


Technical Details	Speed RPM	Square Drive	Max. Torque Nm/ft-lb	Length mm/inch	Weight kg/lb	Air Consumption LPM / CFM	Air Inlet inch	Working Pressure Bar / PSI
282 I O	6,000	1	2,983 (2,200)	345 (13.6)	8.3 (18.3)	201 (7.1)	1/2	6.3(90)
282 I OL				555 (21.9)	9.5 (21)			

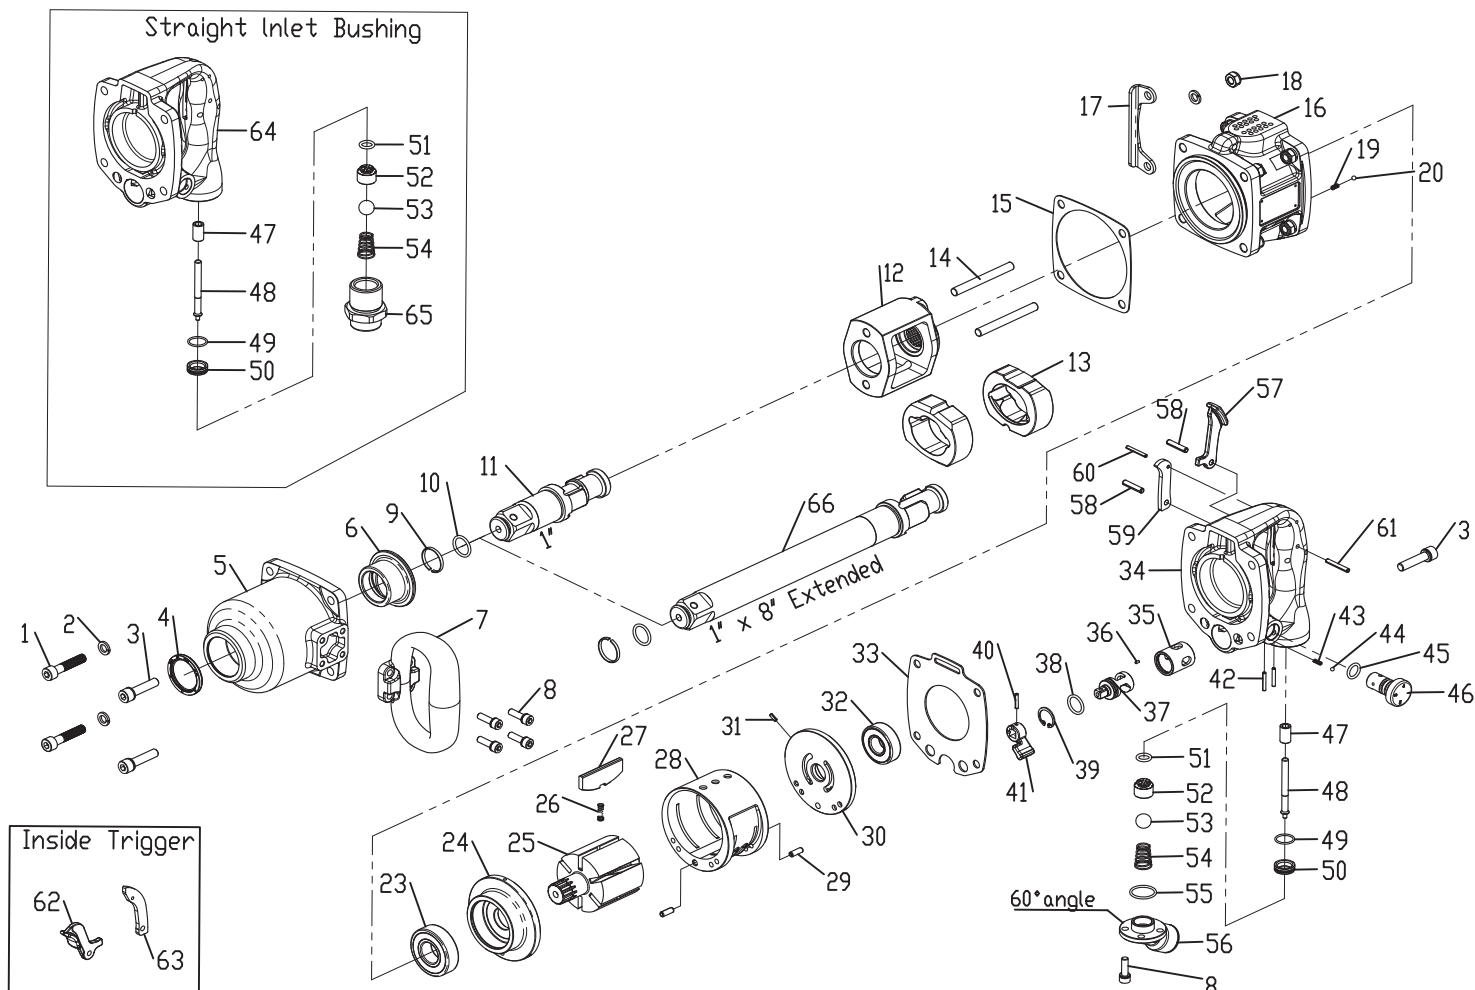

Index No.	Description	Quantity	Index No.	Description	Quantity	Index No.	Description	Quantity
1	Screw	2	25	Rotor	1	47	Bushing	1
2	Spring Washer	10	26	Spring	6	48	Valve Tappet	1
3	Screw w/Washer	6	27	Rotor Blade	6	49	O-Ring	1
4	Oil Seal	1	28	Cylinder	1	50	Throttle Bushing	1
5	Hammer Case	1	29	Spring Pin	2	51	O-Ring	1
6	Anvil Bushing	1	30	Rear End Plate	1	52	Valve Stem	1
7	Side Spade Handle	1	31	Spring Pin	1	53	Nylon Ball	1
8	Screw w/Washer	8	32	Ball Bearing	1	54	Spring	1
9	Socket Retainer	1	33	Gasket	1	55	O-Ring	1
10	O-Ring	1	34	Trigger Handle (for Angle Inlet)	1	56	60° Angle Inlet Bushing	1
11	1" Anvil (Standard)(Twin H.)	1	35	Bushing	1	57	Outside Trigger	1
12	Hammer Cage (Twin H.)	1	36	Pin	1	58	Spring Pin	2
13	Hammer Dog (Twin H.)	2	37	Reverse Valve	1	59	Plug (for Outside Trigger)	1
14	Hammer Pin	2	38	O-Ring	1	60	Spring Pin	1
15	Gasket	1	39	Snap Ring	1	61	Spring Pin	1
16	Motor Housing Assembly	1	40	Spring Pin	1	62	Inside Trigger	1
17	Housing Protector	1	41	Reverse Valve	1	63	Plug (for Inside Trigger)	1
18	Lock Nut	8	42	Spring Pin	2	64	Trigger Handle (for Straight Inlet)	1
19	Spring	1	43	Spring	1	65	Straight Inlet Bushing	1
20	Steel Ball	1	44	Steel Ball	1	66	8" Anvil (Standard)(Twin H.)	1
23	Ball Bearing	1	45	O-Ring	1			
24	Front End Plate	1	46	Air Regulator	1			

* Due to our continuous improvement, all specifications are subject to change without prior notice.