


Technical Details	Speed RPM	Pad mm/inch	Orbit mm/inch	Spindle Size	Weight kg/lb	Air Consumption LPM/ CFM	Air Inlet inch	Noise (DB) LpA LwA	Uncertainty(DB) KpA KwA	Vibration m/s ²	Working Pressure Bar / PSI
52361J	12,000	150 (6.0)	5.0 (3/16)	5/16"-24	0.89 (1.9)	62 (2.2)	1/4	77.2 88.2	3	3.72	6.3 (90)
52361F	12,000	150 (6.0)	5.0 (3/16)	5/16"-24	0.89 (1.9)	62 (2.2)	1/4	77.2 88.2	3	3.72	6.3 (90)
52561J	12,000	150 (6.0)	2.5 (3/32)	5/16"-24	0.86 (1.9)	62 (2.2)	1/4	77.2 88.2	3	3.72	6.3 (90)
52561F	12,000	150 (6.0)	2.5 (3/32)	5/16"-24	0.86 (1.9)	62 (2.2)	1/4	77.2 88.2	3	3.72	6.3 (90)

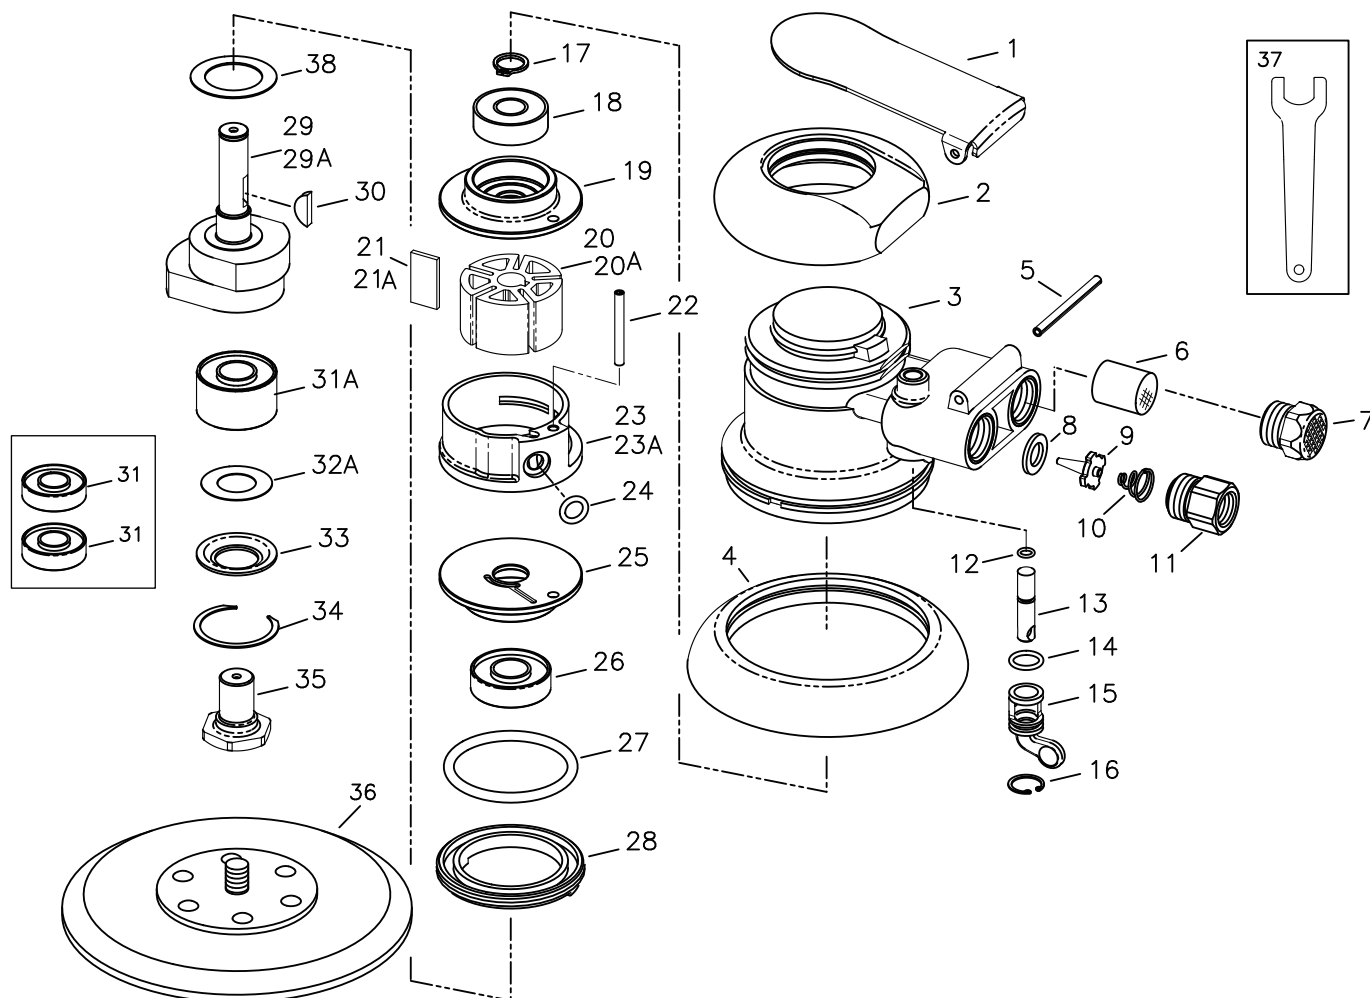

Index No.	Description	Quantity	Index No.	Description	Quantity	Index No.	Description	Quantity
1	Valve Lever	1	16	Snap Ring	1	29	Shaft 6"x5mm (For 52361J,52361F)	1
2	Housing Cover	1	17	Snap Ring	1	29A	Shaft 6"x2.5mm(For 52561J,52561F)	1
3	Motor Housing	1	18	Ball Bearing	1	30	H/R Key	1
4	Non-Vac Shroud	1	19	Upper End Plate	1	31	Ball Bearing (For 52361J,52561J)	2
5	Spring Pin	1	20	Rotor(FOR 52361J,52561J)	1	31A	Ball Bearing (For 52361F, 52561F)	1
6	Muffler	1	21	Blade (FOR 52361J,52561J)	5	32A	Dust Seal	1
7	Muffle Cover	1	21A	Blade (FOR 52361F,52561F)	5	33	Washer	1
8	Valve Seat	1	22	Spring Pin	1	34	Snap Ring	1
9	Throttle Valve	1	23	Cylinder(FOR 52361J,52561J)	1	35	Pad Retainer	1
10	Spring	1	23A	Cylinder(FOR 52361F,52561F)	1	36	6"Pad	1
11	Air Inlet	1	24	O-Ring	1	37	Wrench	1
12	O-Ring	1	25	Lower End Plate	1	38	Dust Seal	1
13	Valve Tappet	1	26	Ball Bearing	1			
14	O-Ring	1	27	O-Ring	1			
15	Regulator	1	28	Retainer Nut	1			