


Technical Details	Speed RPM	Pad mm/inch	Orbit mm/inch	Spindle Size	Weight kg/lb	Air Consumption LPM/ CFM	Air Inlet inch	Noise (DB) LpA LwA	Uncertainty(DB) KpA KwA	Vibration m/s ²	Working Pressure Bar / PSI
52362J	12,000	150 (6.0)	5.0 (3/16)	5/16"-24	0.96 (2.1)	62 (2.2)	1/4	75.1 86.1	3	5.02	6.3 (90)
52362F	12,000	150 (6.0)	5.0 (3/16)	5/16"-24	0.96 (2.1)	62 (2.2)	1/4	75.1 86.1	3	5.02	6.3 (90)
52562J	12,000	150 (6.0)	2.5 (3/32)	5/16"-24	0.92 (2.0)	62 (2.2)	1/4	75.1 86.1	3	5.30	6.3 (90)
52562F	12,000	150 (6.0)	2.5 (3/32)	5/16"-24	0.92 (2.0)	62 (2.2)	1/4	75.1 86.1	3	5.30	6.3 (90)

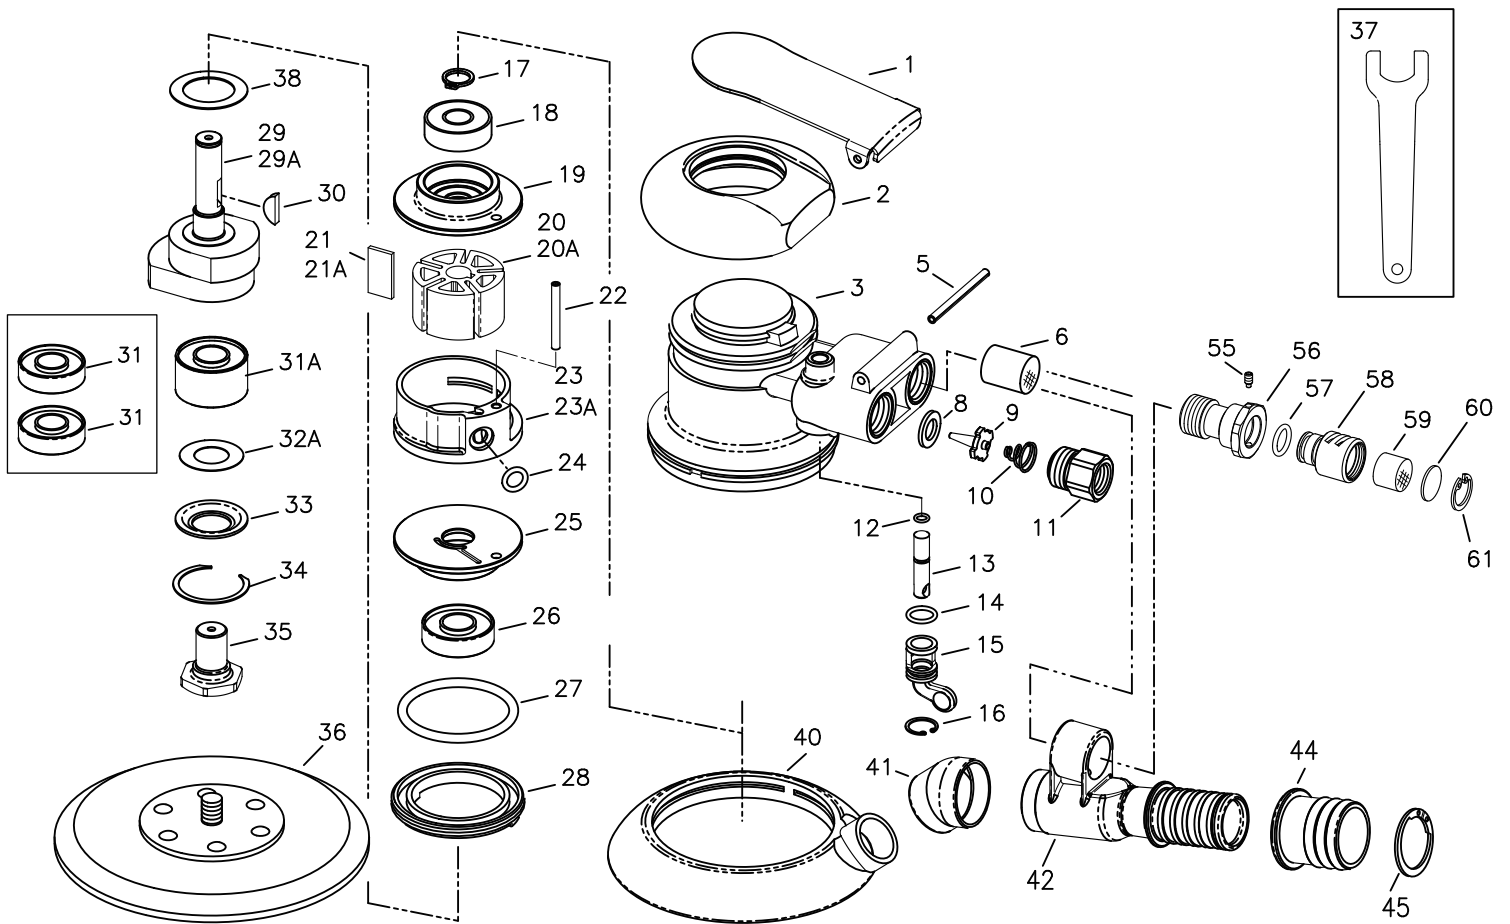

Index No.	Description	Quantity	Index No.	Description	Quantity	Index No.	Description	Quantity
1	Valve Lever	1	20A	Rotor(FOR 52362F,52562F)	1	34	Snap Ring	1
2	Housing Cover	1	21	Blade (FOR 52362J,52562J)	5	35	Pad Retainer	1
3	Motor Housing	1	21A	Blade (FOR 52362F,52562F)	5	36	6" Pad	1
5	Spring Pin	1	22	Spring Pin	1	37	Wrench	1
6	Muffler	1	23	Cylinder(FOR 52362J,52562J)	1	38	Dust Seal	1
8	Valve Seat	1	23A	Cylinder(FOR 52362F,52562F)	1	40	Vac. Shroud	1
9	Throttle Valve	1	24	O-Ring	1	41	Vacuum Adapter	1
10	Spring	1	25	Lower End Plate	1	42	Central Vac. Exhaust Fitting	1
11	Air Inlet	1	26	Ball Bearing	1	44	Hose Adapter Set (1",1-1/8",1-1/4")	1
12	O-Ring	1	27	O-Ring	1	45	Snap Ring	1
13	Valve Tappet	1	28	Retainer Nut	1	55	Screw	2
14	O-Ring	1	29	Shaft 6"x5mm (For 52362J,52362F)	1	56	Central Vac. Retainer	1
15	Regulator	1	29A	Shaft 6"x2.5mm(For 52562J,52562F)	1	57	O-Ring	1
16	Snap Ring	1	30	H/R Key	1	58	Muffler Cap	1
17	Snap Ring	1	31	Ball Bearing (For 52362J,52562J)	2	59	Muffler	1
18	Ball Bearing	1	31A	Ball Bearing (For 52362F, 52562F)	1	60	Plate	1
19	Upper End Plate	1	32A	Dust Seal	1	61	Snap Ring	1
20	Rotor(FOR 52362J,52562J)	1	33	Washer	1			