


Technical Details	Speed RPM	Pad mm/inch	Orbit mm/inch	Spindle Size	Weight kg/lb	Air Consumption LPM/ CFM	Air Inlet inch	Noise (DB) LpA LwA	Uncertainty(DB) KpA KwA	Vibration m/s ²	Working Pressure Bar / PSI
52363J	12,000	150 (6.0)	5.0 (3/16)	5/16"-24	0.96 (2.1)	62 (2.2)	1/4	85.2 96.2	3	4.54	6.3 (90)
52363F	12,000	150 (6.0)	5.0 (3/16)	5/16"-24	0.96 (2.1)	62 (2.2)	1/4	85.2 96.2	3	4.54	6.3 (90)
52563J	12,000	150 (6.0)	2.5 (3/32)	5/16"-24	0.96 (2.1)	62 (2.2)	1/4	85.2 96.2	3	4.54	6.3 (90)
52563F	12,000	150 (6.0)	2.5 (3/32)	5/16"-24	0.96 (2.1)	62 (2.2)	1/4	85.2 96.2	3	4.54	6.3 (90)

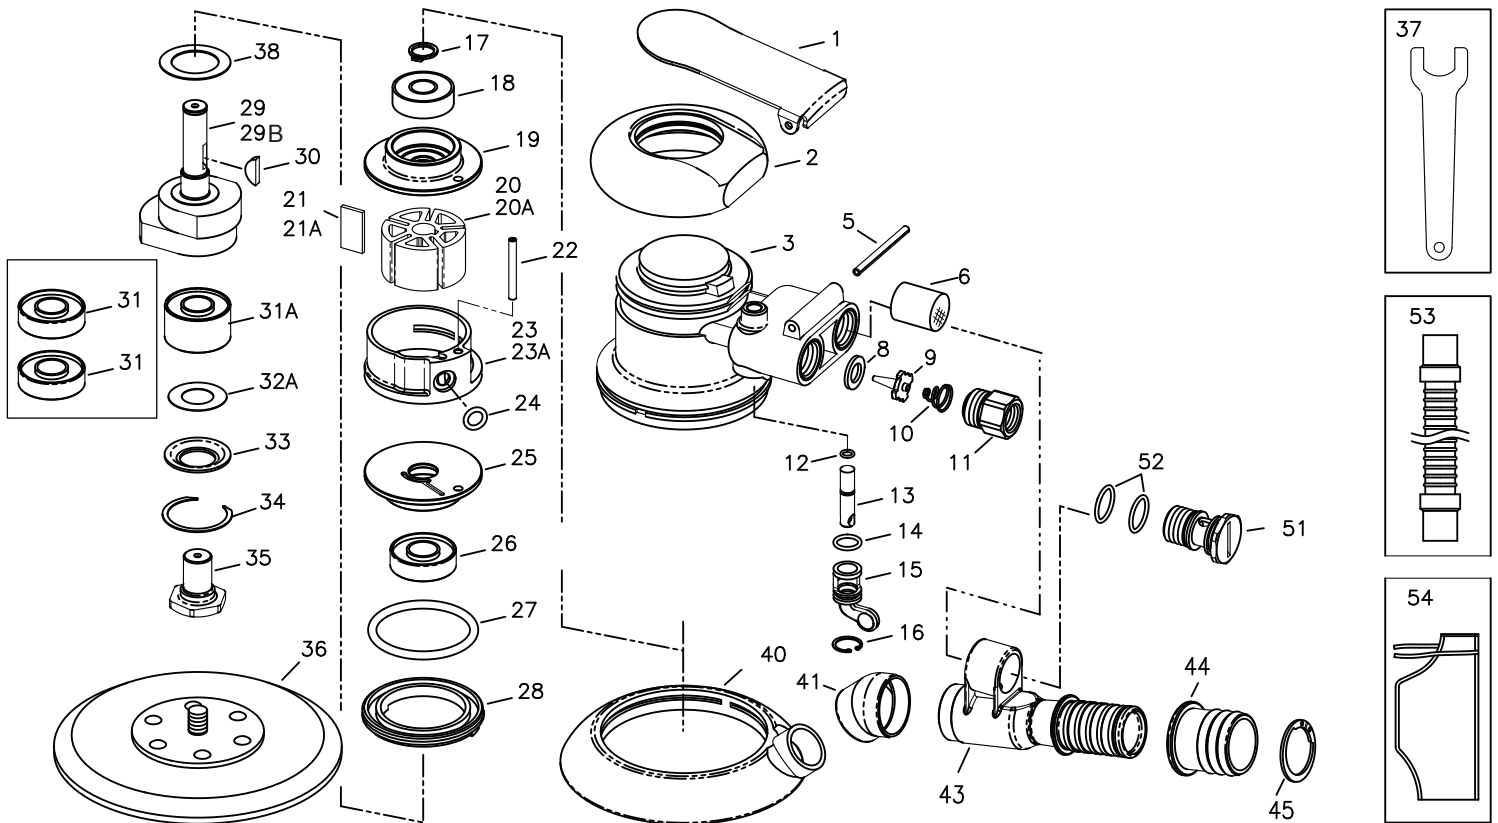

Index No.	Description	Quantity	Index No.	Description	Quantity	Index No.	Description	Quantity
1	Valve Lever	1	20A	Rotor(FOR 52363F,52563F)	1	34	Snap Ring	1
2	Housing Cover	1	21	Blade (FOR 52363J,52563J)	5	35	Pad Retainer	1
3	Motor Housing	1	21A	Blade (FOR 52363F,52563F)	5	36	6"Pad	1
5	Spring Pin	1	22	Spring Pin	1	37	Wrench	1
6	Muffler	1	23	Cylinder(FOR 52363J,52563J)	1	38	Dust Seal	1
8	Valve Seat	1	23A	Cylinder(FOR 52363F,52563F)	1	40	Vac. Shroud	1
9	Throttle Valve	1	24	O-Ring	1	41	Vacuum Adapter	1
10	Spring	1	25	Lower End Plate	1	43	Self Vac. Exhaust Fitting	1
11	Air Inlet	1	26	Ball Bearing	1	44	Hose Adapter (1")	1
12	O-Ring	1	27	O-Ring	1	45	Snap Ring	1
13	Valve Tappet	1	28	Retainer Nut	1	51	Plug	1
14	O-Ring	1	29	Shaft 6"x5mm (For 52363J,52363F)	1	52	O-Ring	2
15	Regulator	1	29B	Shaft 6"x2.5mm(For52563J,52563F)	1	53	Vacuum Hose	1
16	Snap Ring	1	30	H/R Key	1	54	Dust Bag	1
17	Snap Ring	1	31	Ball Bearing (For 52363J,52563J)	2			
18	Ball Bearing	1	31A	Ball Bearing (For 52363F, 52563F)	1			
19	Upper End Plate	1	32A	Dust Seal	1			
20	Rotor(FOR 52363J,52563J)	1	33	Washer	1			