


Technical Details	Speed RPM	Pad mm / inch	Orbit mm / inch	Weight kg / lb	Air Consumption LPM / CFM	Air Inlet inch	Noise (DB) LpA LwA	Uncertainty(DB) KpA KwA	Vibration m / s ²	Working Pressure Bar / PSI
53121	10,000	90 x 180 (3-2/3" x 7")	3.0 (1/8)	0.89 (2.0)	99 (3.5)	1/4	80.5 / 91.5	3	3.96	6.2 (90)

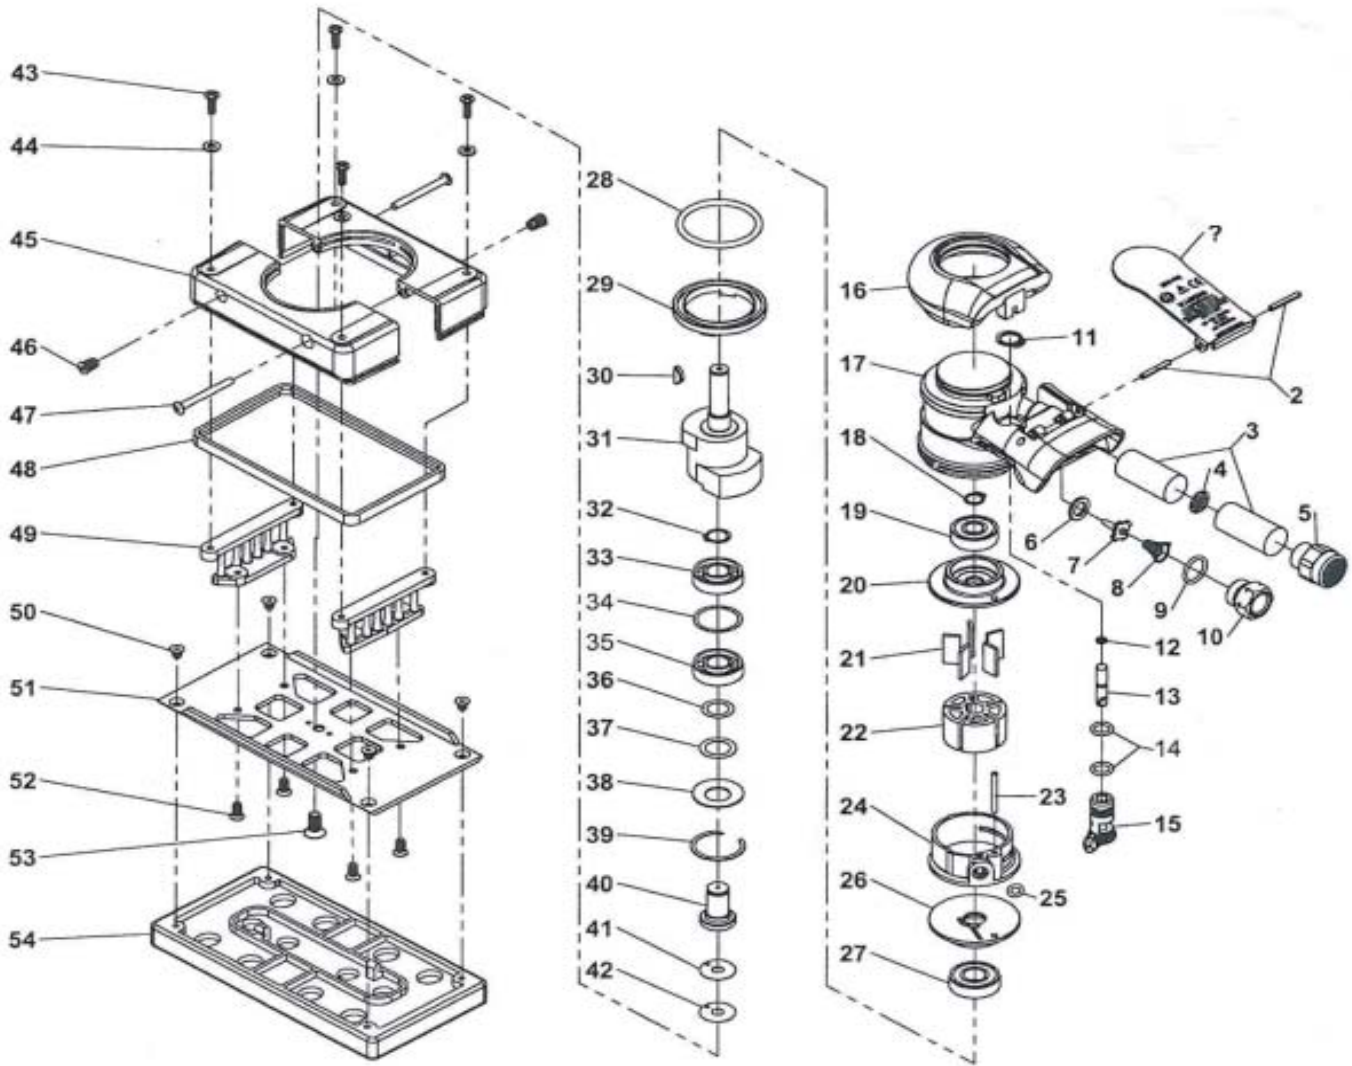

Index No.	Description	Quantity	Index No.	Description	Quantity	Index No.	Description	Quantity
1	Lever	1	19	Bearing(6000zz)	1	37	Spindle Bearing Dust Sheild	1
2	Spring Pin(D3*22)	2	20	Bearing Plate	1	38	Conle Washer	1
3	Silence	2	21	Blade	5	39	Retaining Ring	1
4	Plate	1	22	Rotor	1	40	Spindle	1
5	Muffler Housing	1	23	Spring Pin	1	41	Spacer 0.4THK	1
6	Washer	1	24	Cylinder	1	42	Spacer 0.2THK	1
7	Valve	1	25	O-Ring	1	43	Screw(M4*12)	4
8	Spring	1	26	Front End Plate	1	44	Washer	4
9	O-Ring	1	27	Bearing(6001zz)	1	45	Nv Shroud	2
10	Inlet Bushing	1	28	O-Ring	1	46	Threaded Insert 4mm	2
11	Reetaining Ring(S12)	1	29	Lock Ring	1	47	Screw	2
12	O-Ring	1	30	Key	1	48	Shroud Seal	1
13	Valve Stem	1	31	90*180mmBalance Shaft	1	49	Pad Support	2
14	O-Ring	2	32	Retaining Ring(0.6mm)	1	50	Screw(M4*6)	4
15	Speed Control	1	33	Bearing(6001zz)	1	51	Pad Backing	1
16	Cover	1	34	Spacer0.25THK	1	52	Screw (M4*10)	4
17	Housing	1	35	Bearing(6001zz)	1	53	Screw (M6*14)	1
18	Retaining Ring	1	36	Spacer0.2THK	1	54	Pad	1

* Due to our continuous improvement, all specifications are subject to change without prior notice.