


Technical Details	Speed RPM	Sanding Paper mm/inch	Power KW/HP	Weight kg/lb	Air Consumption LPM/ CFM	Noise (DB) LpA LwA	Uncertainty(DB) KpA KwA	Vibration m/s ²	Air Inlet inch	Working Pressure Bar / PSI
550 I 4G	4500	13 x 610 1/2 x 24	0.35 (0.5)	1.0 (2.2)	113 (4.0)	94 (105)	3	< 2.5	1/4	6.2 (90)

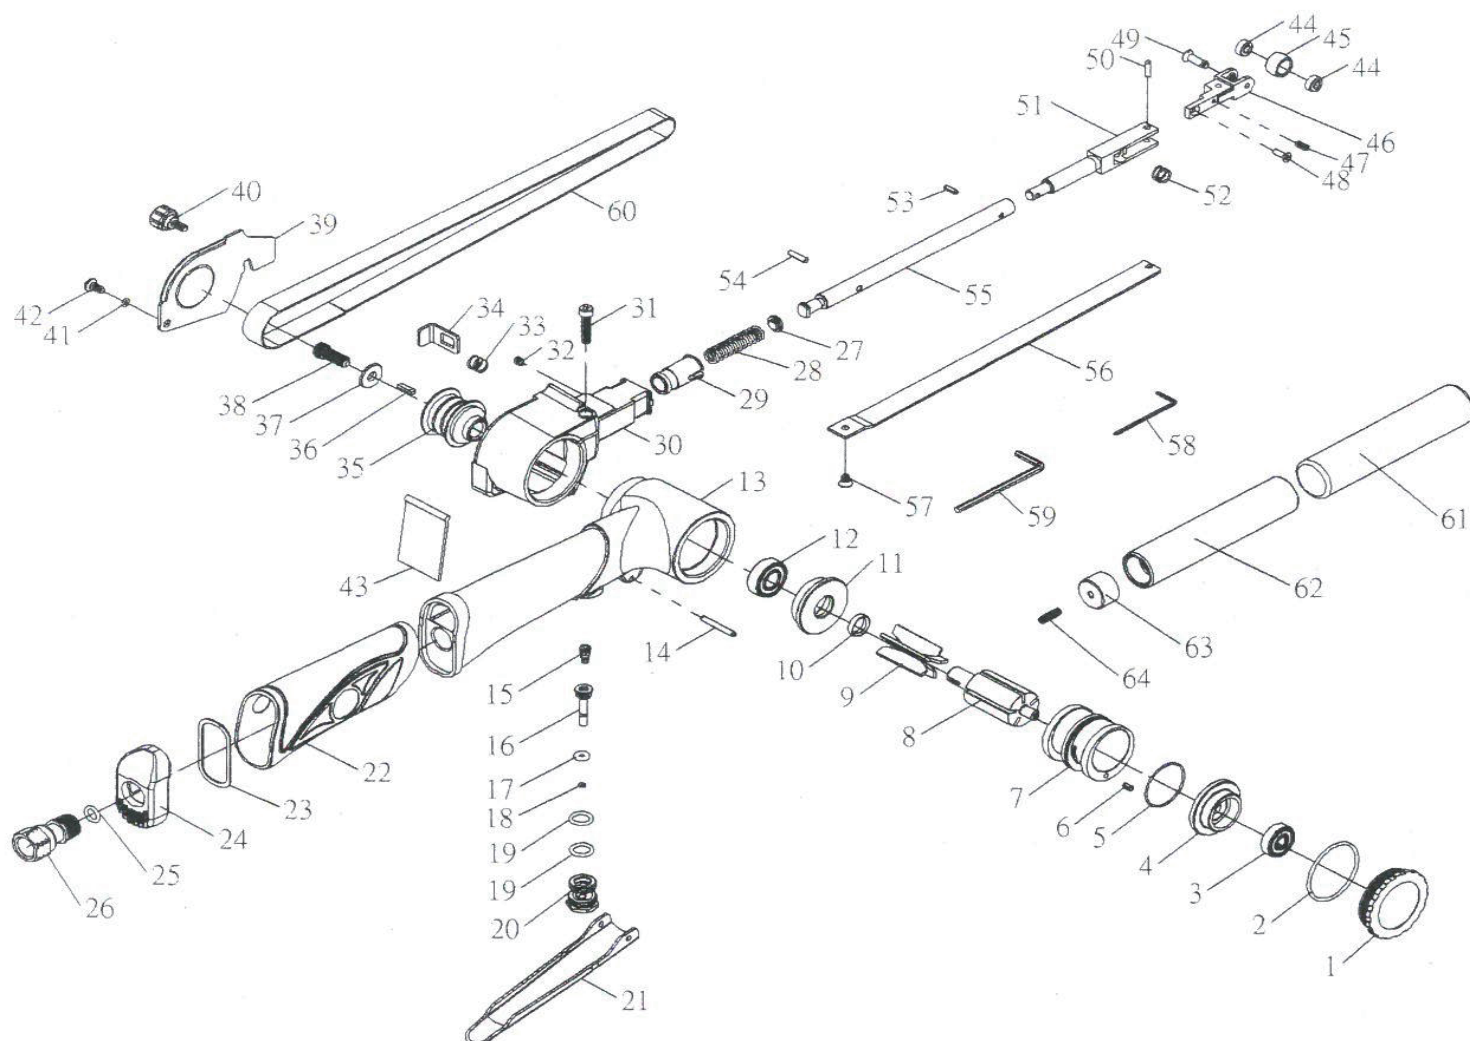

Index No.	Description	Quantity	Index No.	Description	Quantity	Index No.	Description	Quantity
1	Cap	1	23	Fabric Silencer	1	45	Idle Pulley	1
2	O-RING(33.5*1.78)	1	24	Exhaust Control Spacer	1	46	Bracket 10	1
3	Ball Bearing (626zz)	1	25	O-RING(1.9*ID6.8)	1	47	Screw (M3*8)	1
4	End Plate A	1	26	Inlet Bushing	1	48	Screw (M3*10)	1
5	O*RING	1	27	Washer	1	49	Idle Pulley Screw	1
6	Pin (Φ3*5)	1	28	Spring	1	50	Spring(3*10)	1
7	Cylinder	1	29	Guide Cover	1	51	Bracket	1
8	Rotor	1	30	Guard Body	1	52	Spring (1.0*7.2*6.5)	1
9	Rotor Blade	5	31	Screw (M4*20)	1	53	Lever Pin (Φ2.5*8)	1
10	Spacer	1	32	Set Screw (M4*5)	1	57	Lever Pin (Φ3*12)	1
11	End Plate B	1	33	Spring	1	55	Tension Bar	1
12	Ball Bearing (R6zz)	1	34	Block Slice	1	56	Shoe	1
13	Housing	1	35	Drive Pulley	1	57	Screw (M4*6)	1
14	Lever Pin (D3*23)	1	36	Key	1	58	Hexagon Wrenchen Key (1.5mm)	1
15	Spring	1	37	Washer	1	59	Hexagon Wrenchen Key (3mm)	1
16	Valve Stem	1	38	Screw (M6*16)	1	60	Sandpaper Belt #100	1
17	O-Ring (3.6*d2.4)	1	39	Belt Guard	1	61	Grip-Rubber(Optional)	1
18	O-Ring (2.2*d0.9)	1	40	Handle Screw	1	62	Handle(Optional)	1
19	O-Ring (P9)	2	41	O-Ring	1	63	Screw(Optional)	1
20	Valve Body	1	42	Screw (M4*8)	1	64	Screw (M4*14)(Optional)	1
21	Safety Lever	1	43	Dust Cover	1			
22	Cover Handle	1	44	Ball Bearing (684zz)	2			

* Due to our continuous improvement, all specifications are subject to change without prior notice.