


| Technical Details | Speed<br>RPM | Sanding<br>Paper mm/inch | Power<br>KW/HP | Weight<br>kg/lb | Air Consumption<br>LPM/ CFM | Noise (DB)<br>LpA LwA | Uncertainty(DB)<br>KpA KwA | Vibration<br>m/s <sup>2</sup> | Air Inlet<br>inch | Working Pressure<br>Bar / PSI |
|-------------------|--------------|--------------------------|----------------|-----------------|-----------------------------|-----------------------|----------------------------|-------------------------------|-------------------|-------------------------------|
| <b>55112</b>      | 16,500       | 10 x 330<br>(3/8 x 13)   | 0.35 (0.5)     | 2.3 (5.1)       | 99 (3.5)                    | 74 (85)               | 3                          | < 2.5                         | 1/4               | 6.2 (90)                      |

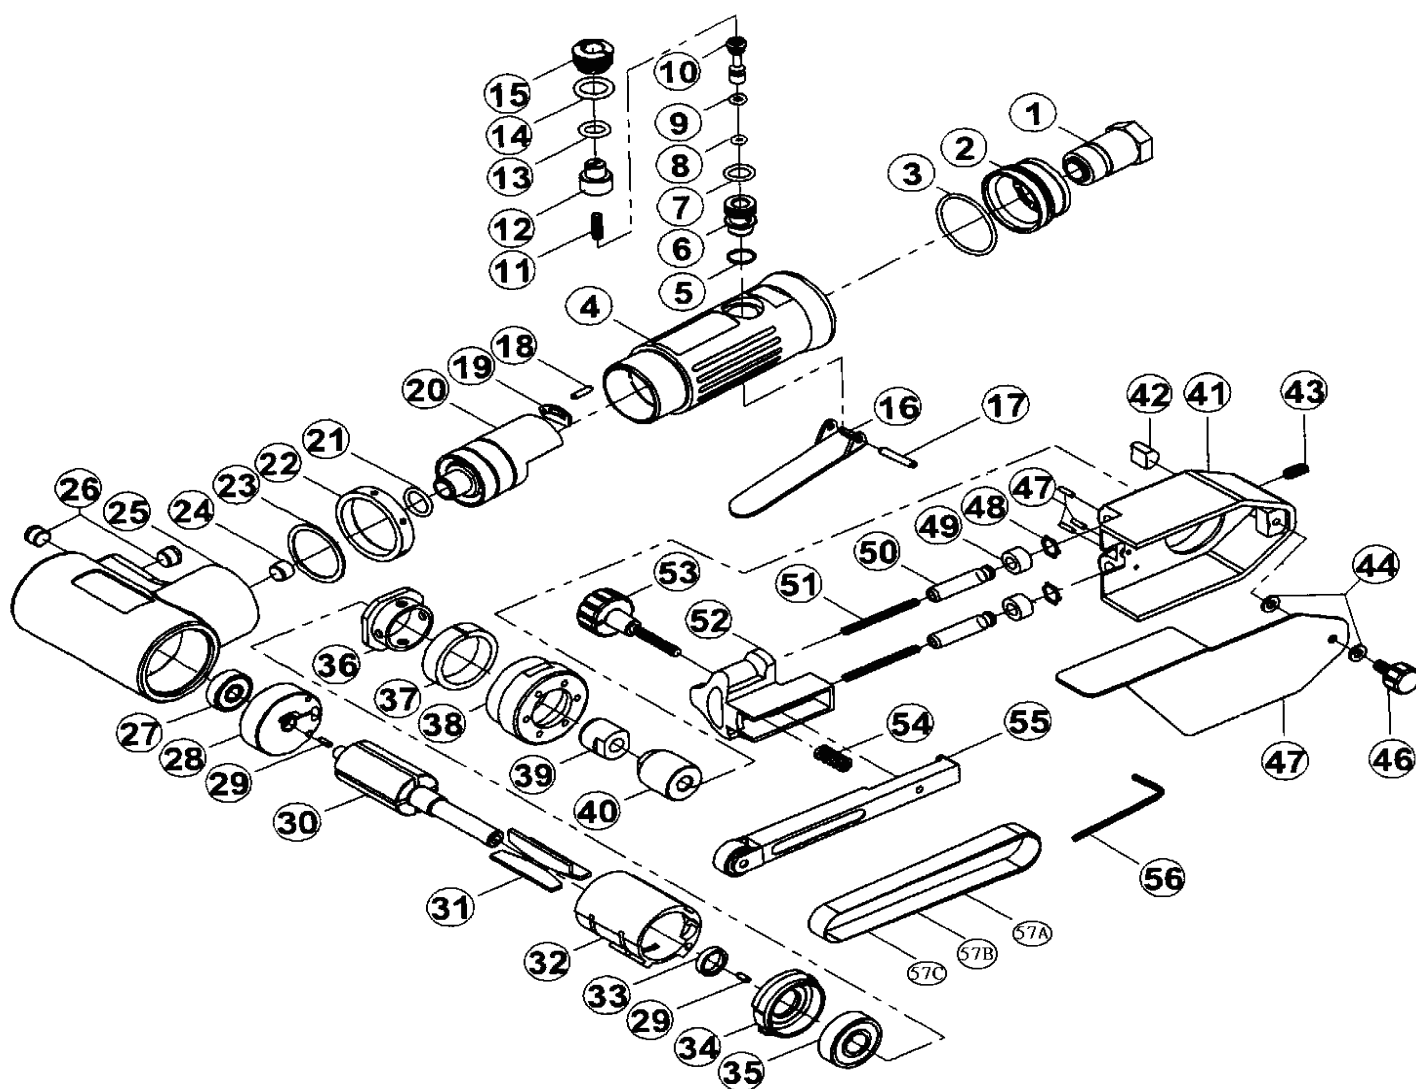

| Index No. | Description            | Quantity | Index No. | Description            | Quantity | Index No. | Description        | Quantity |
|-----------|------------------------|----------|-----------|------------------------|----------|-----------|--------------------|----------|
| 1         | Inlet Bushing          | 1        | 21        | O-Ring                 | 1        | 41        | Hosing             | 1        |
| 2         | Exhaust Control Spacer | 1        | 22        | Lock Nut               | 1        | 42        | Stop Block         | 1        |
| 3         | O-Ring (28.3*1.78)     | 1        | 23        | Seal                   | 1        | 43        | Screw              | 1        |
| 4         | Housing                | 1        | 24        | Screw                  | 1        | 44        | Washer (M4)-D8-t1  | 2        |
| 5         | O-Ring                 | 1        | 25        | Motor Housing          | 1        | 45        | Belt Guard         | 1        |
| 6         | Valve Bushing          | 1        | 26        | Screw                  | 2        | 46        | Handle Screw       | 1        |
| 7         | O-Ring                 | 1        | 27        | Ball Bearing           | 1        | 47        | Pin                | 3        |
| 8         | O-Ring                 | 1        | 28        | Bearing Plate          | 1        | 48        | Washer (M4)-D8-t1  | 2        |
| 9         | O-Ring                 | 1        | 29        | Lever Pin( 2.5x10)     | 2        | 49        | Cotton             | 2        |
| 10        | Valve Stem             | 1        | 30        | Rotor                  | 1        | 50        | Guide Post         | 2        |
| 11        | Valve Spring           | 1        | 31        | Blade                  | 4        | 51        | Spring             | 2        |
| 12        | Air Controller         | 1        | 32        | Cylinder               | 1        | 52        | Tension Arm        | 1        |
| 13        | O-Ring (φ7.9x2.3)      | 1        | 33        | Spacer                 | 1        | 53        | Handle Screw       | 1        |
| 14        | O-Ring                 | 1        | 34        | Bearing Plate          | 1        | 54        | Spring             | 1        |
| 15        | Valve Screw            | 1        | 35        | Ball Bearing           | 1        | 55        | Contact Arm Assy   | 1        |
| 16        | Throttle Lever         | 1        | 36        | Exhaust Control Spacer | 1        | 56        | Hexagon Wrench Key | 1        |
| 17        | Lever Pin              | 1        | 37        | Fabric Slicer          | 1        | 57A       | Belt 10*330 #80    | 1        |
| 18        | Lever Pin              | 1        | 38        | Lock Ring              | 1        | 57B       | Belt 10*330 #100   | 1        |
| 19        | Seal                   | 1        | 39        | Nut                    | 1        | 57C       | Belt 10*330 #120   | 1        |
| 20        | Insert                 | 1        | 40        | Driver Wheel           | 1        |           |                    |          |

\* Due to our continuous improvement, all specifications are subject to change without prior notice.