


Technical Details	Speed RPM	Pad mm/inch	Orbit mm	Spindle Size	Weight kg/lb	Air Consumption LPM/ CFM	Air Inlet inch	Noise (DB) LpA LwA	Uncertainty(DB) KpA KwA	Vibration m/s ²	Working Pressure Bar / PSI
5D56 I	12,000	150 (6.0)	2.5	5/16-24	0.86 (1.9)	62 (2.2)	1/4	75.0	3	3.80	6.2(90)
5D36 I	12,000	150 (6.0)	5.0	5/16-24	0.89 (2.0)	62 (2.2)	1/4	75.0	3	4.15	6.2(90)
5D16 I	12,000	150 (6.0)	9.0	5/16-24	0.93 (2.0)	62 (2.2)	1/4	75.0	3	4.50	6.2(90)
5D55 I	12,000	125 (5.0)	2.5	5/16-24	0.82 (1.8)	62 (2.2)	1/4	75.0	3	3.15	6.2(90)
5D35 I	12,000	125 (5.0)	5.0	5/16-24	0.84 (1.8)	62 (2.2)	1/4	75.0	3	3.53	6.2(90)
5D15 I	12,000	125 (5.0)	9.0	5/16-24	0.87 (1.9)	62 (2.2)	1/4	75.0	3	4.80	6.2(90)
5D53 I	12,000	75 (3.0)	2.5	5/16-24	0.82 (1.8)	62 (2.2)	1/4	75.0	3	2.81	6.2(90)

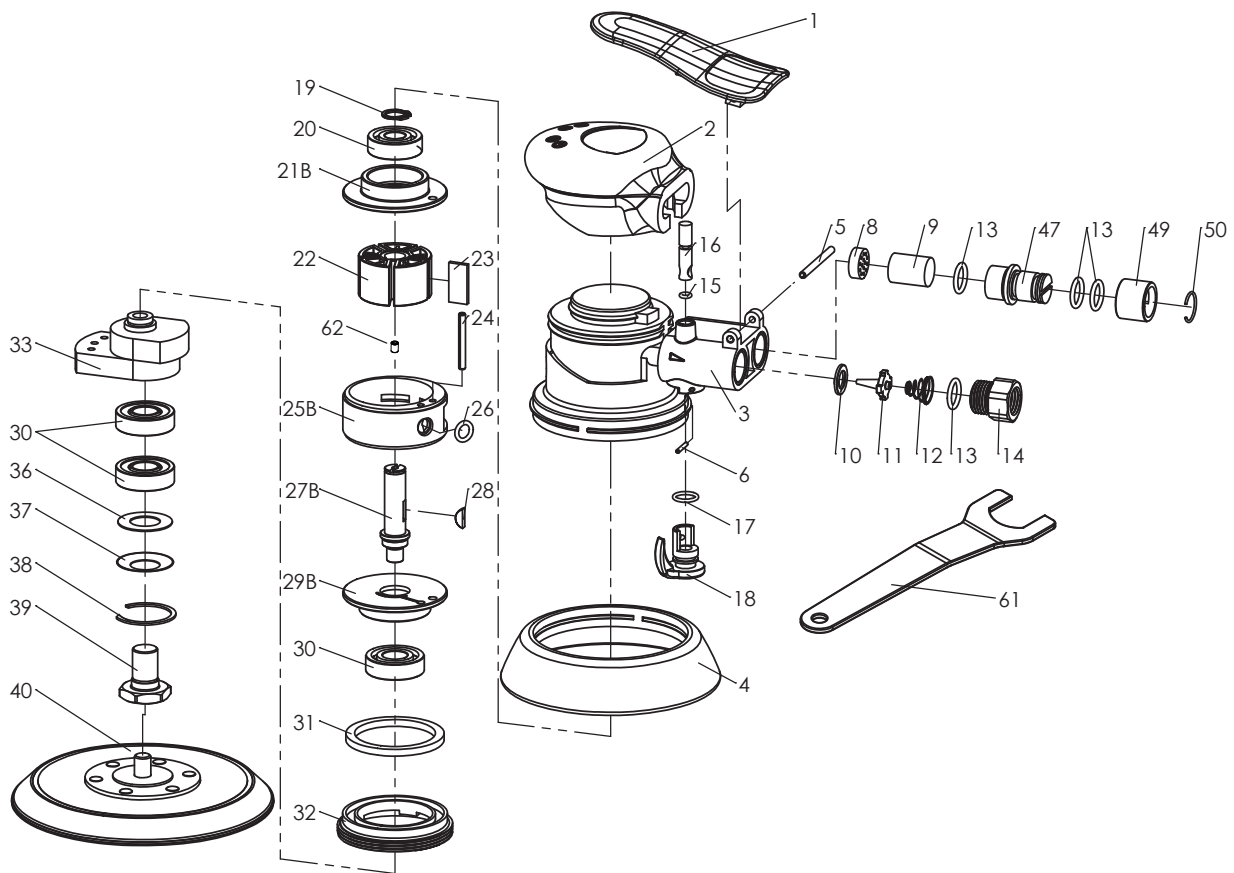

Index No.	Description	Quantity	Index No.	Description	Quantity	Index No.	Description	Quantity
1*	Lever	1	16	Valve Stem	1	30	Ball Bearing (6001)	3
2	Housing Cover	1	17	O-Ring (9.5 x Ø1.5)	1	31	Ring	1
3	Motor Housing	1	18	Regulator	1	32	Lock Ring	1
4*	Shroud	1	19	Snap Ring	1	33*	Balancer	1
5	Spring Pin (3 x 40)	1	20	Ball Bearing (6000)	1	36	Seal	1
6	Spring Pin (1.5 x 12)	1	21B	End Plate	1	37	Washer	1
8	Deflector	1	22	Rotor	1	38	Snap Ring	1
9	Muffler	1	23	Blade	5	39*	Pad Retainer	1
10	Valve Seat	1	24	Snap Ring (3 x 28)	1	40*	Backing Pad	1
11	Throttle Valve	1	25B	Cylinder	1	47	Exhaust Adaptor	1
12	Spring	1	26	O-Ring (6.8 x Ø1.9)	1	49	Muffler Cover	1
13	O-Ring (11 x Ø2)	4	27B	Shaft	1	50	C-Ring	1
14	Air Inlet	1	28	H/R Key (3 x 10)	1	61	Spanner	1
15	O-Ring (3 x Ø1.5)	1	29B	End Plate	1	62	Screw	1

* Please specify corresponding pad size or orbital size when order spare part #01, #04, #33, #39, #40.

* Due to our continuous improvement, all specifications are subject to change without prior notice.