



NeuElite Tool Series

- **Lightweight** design for easy control
- **Ergonomic and comfortable** palm grip
- **Powerful up to 0.33 HP**
- **Low noise and low vibration**
- **Built-in air regulator**
- **Rear exhaust**


0.33 HP

polishing
50027 2" **50037** 3"
Buffer - 2,500 RPM

fine sanding
3mm orbit
52126 2" **52136** 3"
Orbital Sander - 16,000 RPM

360° Rotating Head
55126 (10 x 330 mm)
Belt Sander - 20,000 RPM

**Screw on
abrasive**
54026 2" **54036** 3"
Disc Sander - 20,000 RPM

**Hook & Loop
abrasive**
54027 2" **54037** 3"
Disc Sander - 20,000 RPM

detail work
0.06 HP
**Low Power is ideal
removing minor
clear coat defects**
58416 30mm Pad
Nib Sander - 4,000 RPM



Power: 0.25 KW (0.33 HP) / Air Inlet : 1/4" / Working Pressure : 6.2 Bar (90 PSI)

Item No.	Speed RPM	Pad mm/inch	Orbit mm/inch	Spindle Size	Length mm/inch	Weight kg/lb	Air Consumption LPM / CFM	Vibration m/s ²	Noise Level LpA / LwA
50027	2,500	50 (2)	-	5/16"-24	103 (4.1)	0.7 (1.6)	67 (2.4)	< 2.5	69.3 / 80.3 DB
50037	2,500	75 (3)	-	5/16"-24	103 (4.1)	0.7 (1.6)	67 (2.4)	< 2.5	69.3 / 80.3 DB
52126	16,000	50 (2)	3.0 (1/8)	5/16"-24	103 (4.1)	0.6 (1.3)	67 (2.4)	2.67	76.2 / 87.2 DB
52136	16,000	75 (3)	3.0 (1/8)	5/16"-24	103 (4.1)	0.6 (1.3)	67 (2.4)	< 2.5	76.2 / 87.2 DB
54026	20,000	50 (2)	-	1/4"-20	103 (4.1)	0.5 (1.0)	67 (2.4)	< 2.5	76.2 / 87.2 DB
54036	20,000	75 (3)	-	1/4"-20	103 (4.1)	0.5 (1.0)	67 (2.4)	< 2.5	76.2 / 87.2 DB
54027	20,000	50 (2)	-	5/16"-24	103 (4.1)	0.5 (1.0)	67 (2.4)	< 2.5	76.2 / 87.2 DB
54037	20,000	75 (3)	-	5/16"-24	103 (4.1)	0.5 (1.0)	67 (2.4)	< 2.5	76.2 / 87.2 DB
55126	20,000	10 x 330 (0.4 x 13)	-	-	214 (8.4)	0.7 (1.5)	67 (2.4)	< 2.5	72.3 / 83.3 DB
58416	4,000	30 (1.2)	3.0 (1/8)	M10 x 1.25	103 (4.1)	0.6 (1.3)	11 (0.4)	2.86	72.6 / 83.6 DB



NeuElite Tool Series

Efficiency beveling and remove sharp edge!

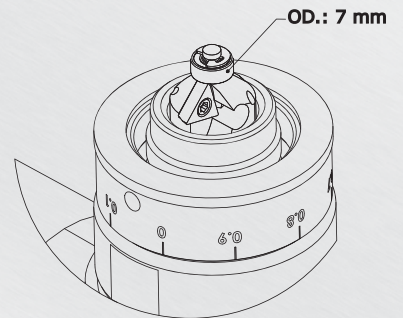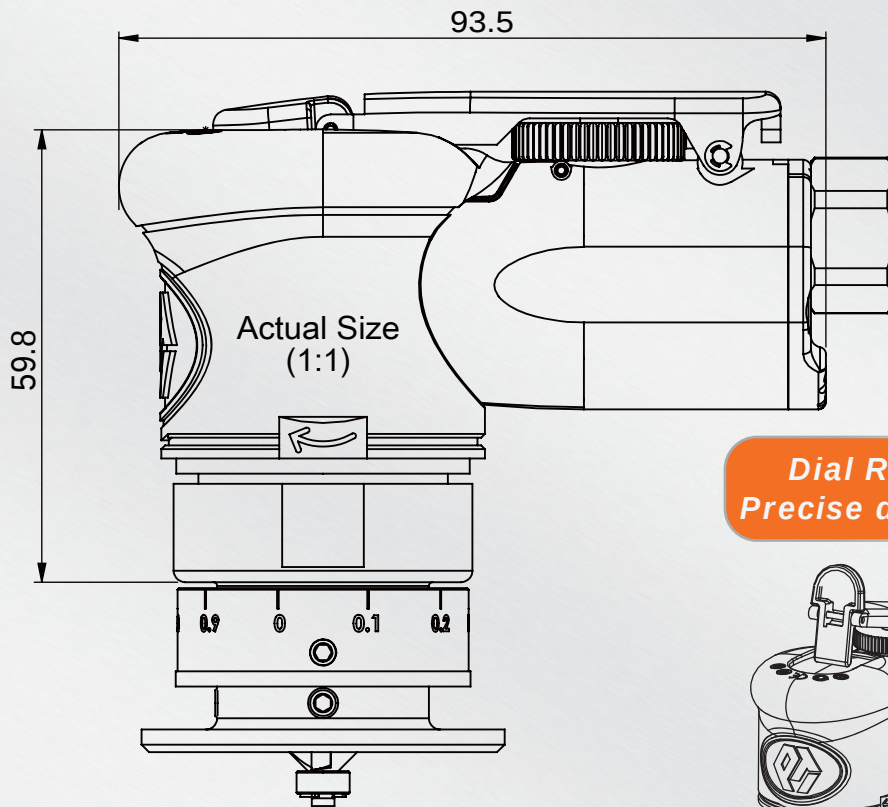


Milling Head



#R81306-17: Triangular Blade

**Dial Ring for
Precise deburring**

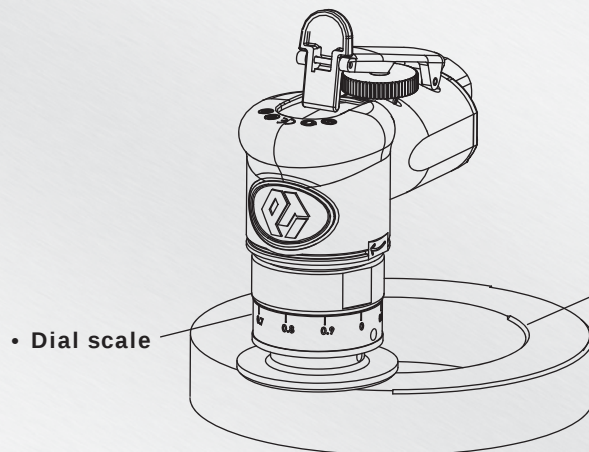


• Dial scale

- Bevel Angle : 45°
- Chamfer: 1C

Switchable

- screw on abrasive
- collet mounted grinding



71206

1/4" Die Grinder

0.33 HP



81306

Beveling Tool

Power: 0.25 KW (0.33 HP) / Air Inlet : 1/4" / Working Pressure : 6.2 Bar (90 PSI)

Item No.	Speed RPM	Collet mm/inch	Chamfer	Min. Thickness	Length mm/inch	Weight kg/lb	Air Consumption LPM / CFM	Vibration m/s ²	Noise Level LpA / LwA
71206	20,000	6 (1/4)	-	-	103 (4.1)	0.5 (1.0)	67 (2.4)	4.19	72.3 / 83.3 DB
81306	20,000	-	1 C	2.5 mm	103 (4.1)	0.6 (1.3)	67 (2.4)	< 2.5	72.3 / 83.3 DB