


Technical Details	Speed RPM	Pad mm/inch	Orbit mm	Spindle Size	Weight kg/lb	Air Consumption LPM/ CFM	Air Inlet inch	Noise (DB) LpA LwA	Uncertainty(DB) KpA KwA	Vibration m/s ²	Working Pressure Bar / PSI
5D562	12,000	150 (6.0)	2.5	5/16-24	0.92 (2.0)	62 (2.2)	1/4	71	3	3.80	6.2(90)
5D362	12,000	150 (6.0)	5.0	5/16-24	0.96 (2.1)	62 (2.2)	1/4	71	3	4.15	6.2(90)
5D162	12,000	150 (6.0)	9.0	5/16-24	1.00 (2.2)	62 (2.2)	1/4	71	3	4.50	6.2(90)
5D552	12,000	125 (5.0)	2.5	5/16-24	0.89 (1.9)	62 (2.2)	1/4	71	3	3.15	6.2(90)
5D352	12,000	125 (5.0)	5.0	5/16-24	0.91 (2.0)	62 (2.2)	1/4	71	3	3.53	6.2(90)
5D152	12,000	125 (5.0)	9.0	5/16-24	0.94 (2.1)	62 (2.2)	1/4	71	3	4.80	6.2(90)
5D532	12,000	75 (3.0)	2.5	5/16-24	0.82 (1.8)	62 (2.2)	1/4	71	3	2.81	6.2(90)

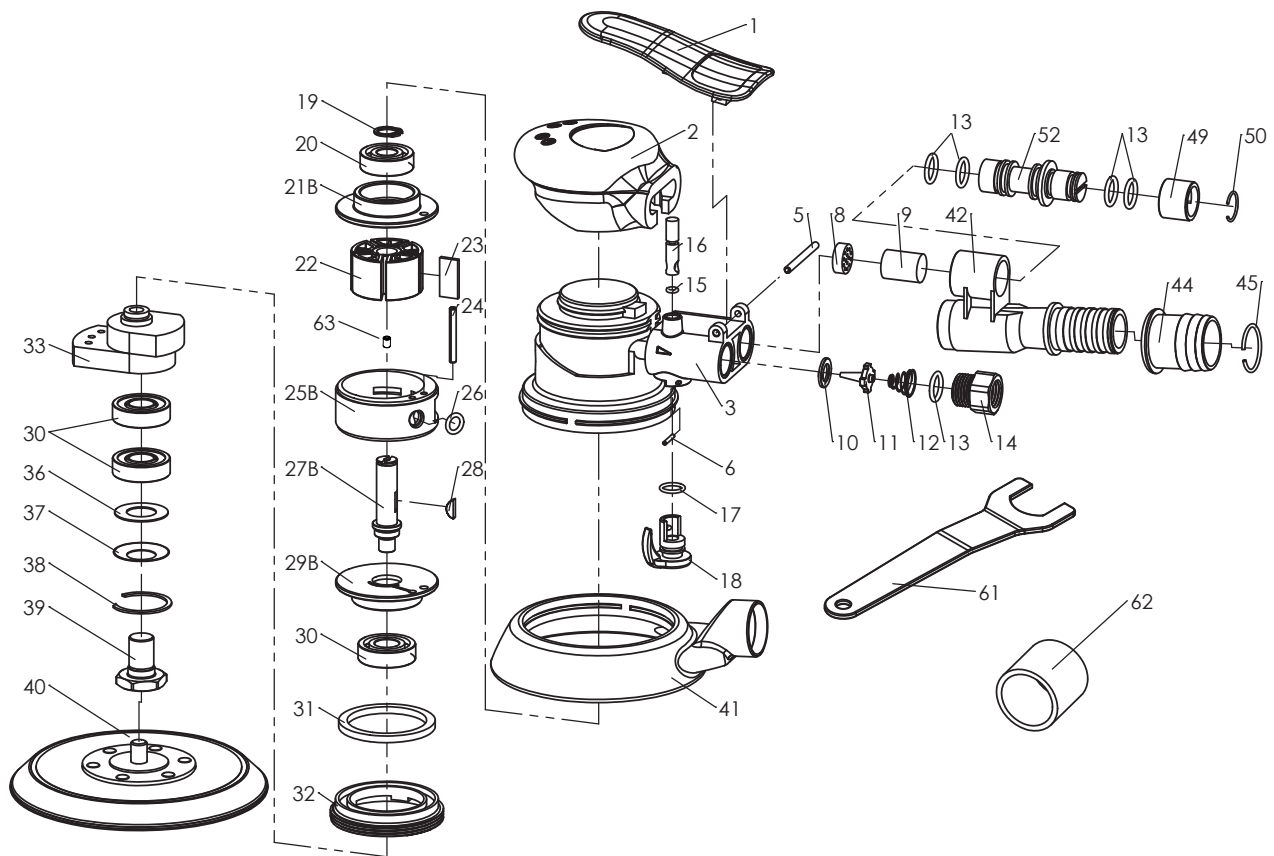

Index No.	Description	Quantity	Index No.	Description	Quantity	Index No.	Description	Quantity
1*	Lever	1	18	Regulator	1	33*	Balancer	1
2	Housing Cover	1	19	Snap Ring	1	36	Seal	1
3	Motor Housing	1	20	Ball Bearing (6000)	1	37	Washer	1
5	Spring Pin (3 x 40)	1	21B	End Plate	1	38	Snap Ring	1
6	Spring Pin (1.5 x 12)	1	22	Rotor	1	39*	Pad Retainer	1
8	Deflector	1	23	Blade	5	40*	Backing Pad	1
9	Muffler	1	24	Snap Ring (3 x 28)	1	41*	Shroud	1
10	Valve Seat	1	25B	Cylinder	1	42	Central Vac. Hose Fitting	1
11	Throttle Valve	1	26	O-Ring (6.8 x Ø1.9)	1	44	Swivel Hose Adapter (1")	1
12	Spring	1	27B	Shaft	1	45	C-Ring	1
13	O-Ring (11 x Ø2)	5	28	H/R Key (3 x 10)	1	49	Muffler Cover	1
14	Air Inlet	1	29B	End Plate	1	50	C-Ring	1
15	O-Ring (3 x Ø1.5)	1	30	Ball Bearing (6001)	3	52	Central Exhaust Adaptor	1
16	Valve Stem	1	31	Ring	1	61	Spanner	1
17	O-Ring (9.5 x Ø1.5)	1	32	Lock Ring	1	62	Swivel Hose Adapter (1-1/4")	1
						63	Screw	1

* Please specify corresponding pad size or orbital size when order spare part #01, #33, #39, #40, #41.

* Due to our continuous improvement, all specifications are subject to change without prior notice.