



Mini Compact Series

- Mini and compact design with industrial level quality
- Durable, composite and lightweight body
- Ergonomic pistol grip with trigger control

Mini & Compact




B-22106
Glow Plug Removal Kit

- Suitable for safe and quick removal of 8 mm, 10 mm and 12 mm glow plugs
- Use **digital pressure regulator** to fix the required torque to avoid breaking plugs.
- Contents :
 - 1 x 22106 Mini Air Impact Wrench
 - 1 x A2098 Digital Pressure Regulator
 - 3 x 1/4" Deep Sockets (8, 10 & 12 mm)
 - 1 x 1/4" Dr. Impact Universal Joint


- Torque Setting :
 - 35 PSI (2.41 Bar) --> 40 Nm
 - 25 PSI (1.72 Bar) --> 30 Nm
 - 20 PSI (1.38 Bar) --> 20 Nm
 - 13 PSI (0.90 Bar) --> 10 Nm




22106
1/4" Air Impact Wrench

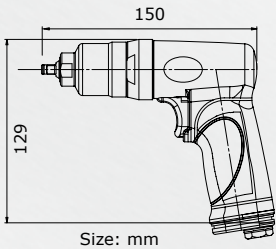


62106
1/4" Air Screwdriver

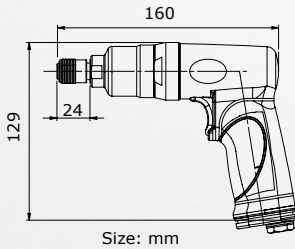

64206
1/4" Air Screwdriver (Direct Drive)

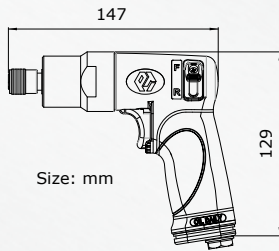

1/4" 32506 3/8" 33506
Reversible Air Drill



Power: 0.28 KW (0.38 HP) / Air Inlet : 1/4" / Working Pressure : 6.2 Bar (90 PSI)

Item No.	Speed RPM	Chuck Cap. mm/inch	Chuck mm/inch	Max. Torque Nm/ft-lb	Reversible or not	Length mm/inch	Weight kg/lb	Air Consumption LPM / CFM	Vibration m/s²	Noise Level LpA / LwA
22106	15,000	-	-	68 (50)	✓	150 (5.9)	0.7 (1.6)	51 (1.8)	< 2.5	80.1 / 91.1 DB
62106	15,000	-	1/4" Hex	68 (50)	✓	160 (6.3)	0.7 (1.6)	76 (2.7)	4.90	76.9 / 87.9 DB
64206	1,800	-	1/4" Hex	-	✓	147 (5.8)	0.7 (1.6)	76 (2.7)	< 2.5	80.9 / 91.9 DB
32506	1,800	6 (1/4)	-	-	✓	163 (6.4)	0.8 (1.8)	76 (2.7)	< 2.5	80.9 / 91.9 DB
33506	1,800	10 (3/8)	-	-	✓	173 (6.8)	0.8 (1.8)	76 (2.7)	< 2.5	80.9 / 91.9 DB

Mini & Compact



- Contents:
- 1 x Mini Disc Sander (54106)
- 1 x 2" Backing Pad (A3122B)
- 1 x 3" Backing Pad (A3123B)
- 1 x 2" Surface Conditioning Disc - Medium (A3122C-M)
- 1 x 3" Surface Conditioning Disc - Medium (A3123C-M)
- 1 x 2" Surface Conditioning Disc - Coarse (A3122C-C)
- 1 x 3" Surface Conditioning Disc - Coarse (A3123C-C)
- 2 x 2" Sanding Disc (A3122S-80, 80 Grit)
- 2 x 3" Sanding Disc (A3123S-80, 80 Grit)

B-54106
3" Disc Sander Kit



54106
3" Disc Sander







51406
Orbital Sander (3 mm Orbit)



50006
Pistol Polisher



71106
Pistol Type 1/4" Die Grinder

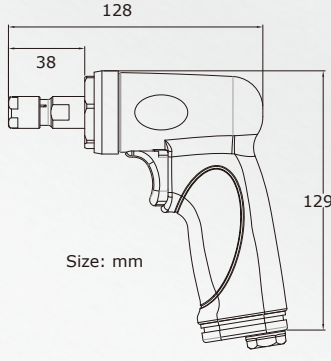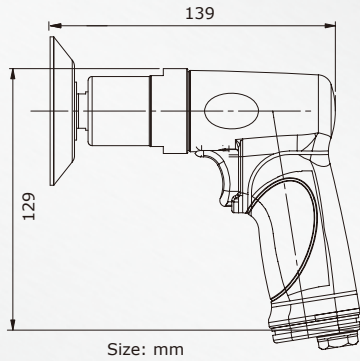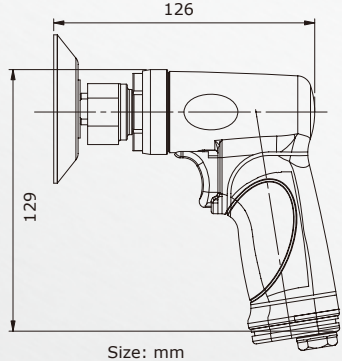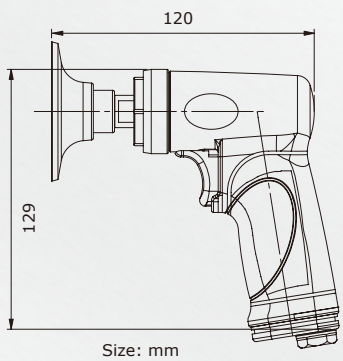

Power: 0.28 KW (0.38 HP) / Air Inlet : 1/4" / Working Pressure : 6.2 Bar (90 PSI)

Item No.	Speed RPM	Chuck Cap. mm/inch	Pad mm/inch	Spindle Size	Length mm/inch	Weight kg/lb	Air Consumption LPM / CFM	Vibration m/s ²	Noise Level LpA / LwA
54106	18,000	-	75 (3)	1/4" - 20	120 (4.7)	0.5 (1.1)	76 (2.7)	2.50	78.1 / 89.1 DB
51406	18,000	-	75 (3)	5/16" - 24	126 (5.0)	0.6 (1.3)	76 (2.7)	7.19	77.2 / 88.2 DB
50006	5,000	-	75 (3)	5/16" - 24	139 (5.5)	0.7 (1.6)	76 (2.7)	<2.5	78.4 / 89.4 DB
71106	18,000	6 (1/4)	-	-	128 (5.0)	0.5 (1.1)	76 (2.7)	6.58	75.6 / 86.6 DB