


Technical Details	Speed RPM	Power KW/HP	Collet mm/inch	Length mm/inch	Weight kg/lb	Consumption LPM / CFM	Uncertainty KpA Kwa	Vibration m/s ²	Air Inlet inch	Pressure Bar / PSI
3A602L-I	3,600	0.37 (0.5)	2.4-5.9mm	327 (12.9)	1.00 (2.2)	99 (3.5)	82	< 2.5	1/4	6.2 (90)

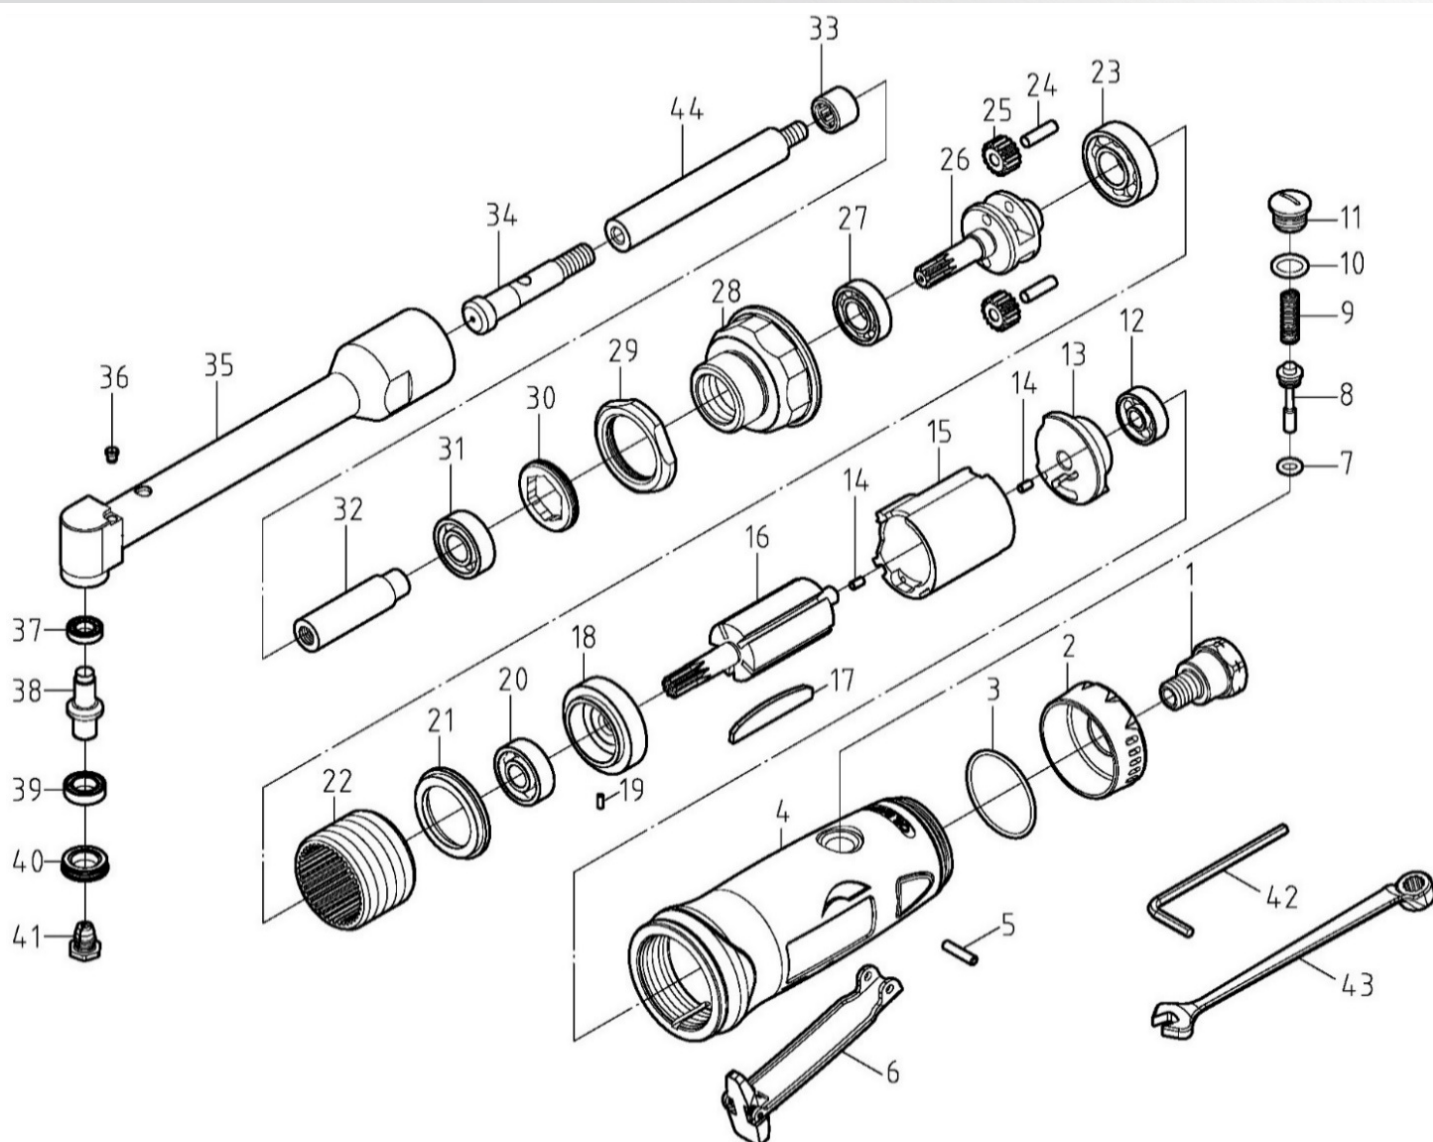

Index No.	Description	Quantity	Index No.	Description	Quantity	Index No.	Description	Quantity
1	Air Inlet	1	18	Front Plate	1	35	Angle Housing	1
2	Exhaust Deflector	1	19	Pin	1	36	Oil Drop	1
3	O-Ring	1	20	Ball Bearing	1	37	Ball Bearing	1
4	Housing	1	21	Washer	1	38	Bevel Gear	1
5	Spring Pin	1	22	Internal Gear	1	39	Ball Bearing	1
6	Trigger	1	23	Ball Bearing	1	40	Cylinder Set Screw	1
7	O-Ring	1	24	Pin	2	41-1	Chuck(Φ5.9)	1
8	Pin Valve Rod	1	25	Gear	2	41-2	Chuck(Φ5.8)	1
9	Spring	1	26	Gear Carrier	1	41-3	Chuck(Φ4.6)	1
10	O-Ring	1	27	Ball Bearing	1	41-4	Chuck(Φ4.5)	1
11	Screw	1	28	Lock Nut	1	41-5	Chuck(Φ3.2)	1
12	Ball Bearing	1	29	Lock Nut	1	41-6	Chuck(Φ3.1)	1
13	Rear Plate	1	30	Lock Nut	1	41-7	Chuck(Φ2.5)	1
14	Spring Pin	2	31	Ball Bearing	1	41-8	Chuck(Φ2.4)	1
15	Cylinder	1	32	Drive Bushing	1	41-9	Chuck(Φ3.0)	1
16	Rotor	1	33	Needle Bearing	1	42	Wrench	1
17	Blade	5	34	Driving Gear Spindle	1	43	Wrench	1
						44	Drive Bushing	1

* Due to our continuous improvement, all specifications are subject to change without prior notice.